





# QPHOTONICS, LLC

3830 Packard Road,  
Suite 170,  
Ann Arbor, MI 48108,  
USA

Phone: 734-477-0133  
Fax: 734-477-0166  
Email: info@qphotonics.com  
http://www.qphotonics.com


MODEL	QFLD-488-20S
PART NUMBER	SAMPLE

Parameter	Value	Units
Internal Temperature	25	°C
Thermistor Resistance	10.0	k?
Optical Output Power	20	mW
Threshold Current	24	mA
Operating Current	75	mA
<b>Maximum Operating Current</b>	<b>82</b>	<b>mA</b>
Operating Voltage	6.06	V
Monitor Current	0.04	mA
Center Wavelength	488.5	nm
Spectral Width	0.76	nm

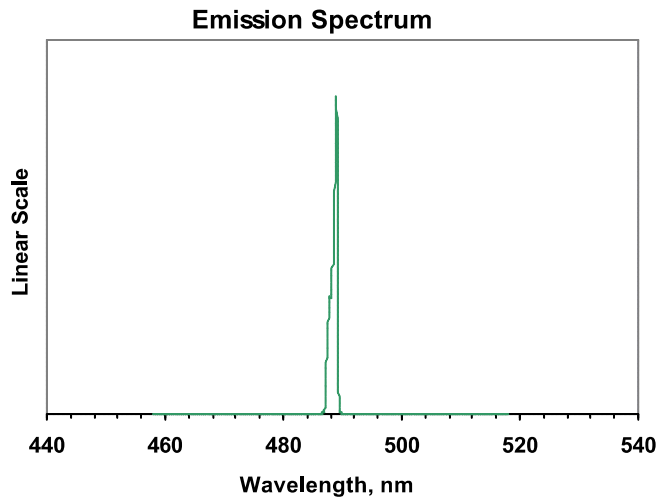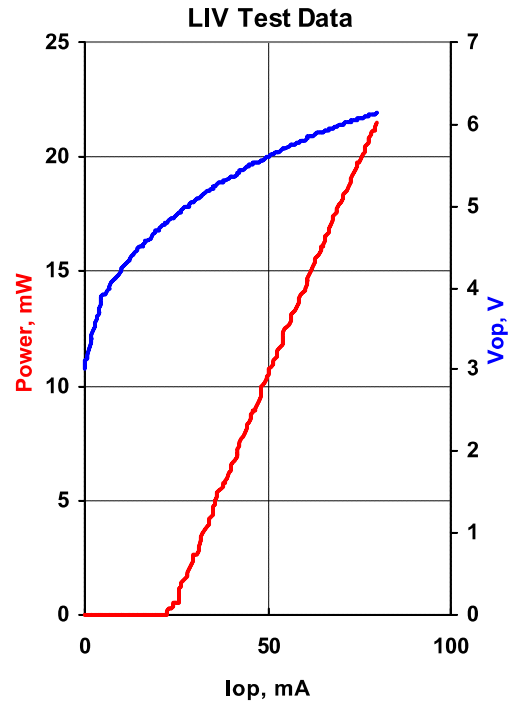

Fiber Type	S405-XP
NA	0.14
Connector	FC/PC

Pin	Connection
1	TE Cooler (+)
2	Thermistor
3	PD Anode (-)
4	PD Cathode (+)
5	Thermistor
10	LD Anode (+)
11	LD Cathode (-)
14	TE Cooler (-)

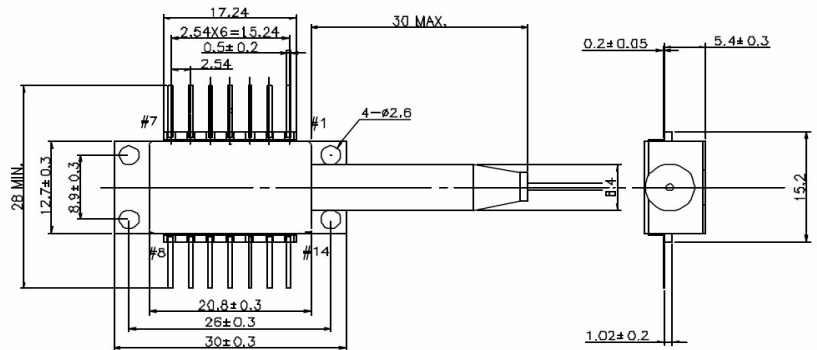

Operator	
Date	