

The Pulse Delay Generator is a multifunctional and high performance instrument that enables the user to consolidate multiple functions into one compact device.



This unit is a great as set to generate high frequency pulses, delays and bursts. It's an ideal testing and timing control instrument for electronics and lasers.

Key features:

- 10 ps delay resolution
- 80 ps RMS jitter
- Min input voltage: 30 mV
- 150 MHz voltage level converter
- 20 MHz standalone generator
- 2 ns pulse resolution
- Burst/Gate generator
- USB interface
- 2 years warranty

Key applications:

- Ideal for OEM integration
- Components test
- Laser timing control
- Laser pulse-picking
- Precision pulse application

OPERATING MODES

The Pulse Delay Generator offers several operating modes including pulse generator, frequency divider, burst and pulse picker. This unit generates accurate pulses with a repetition rate up to 20 MHz, variable pulse widths from 5 ns to 2^{62} ns and pulse delays from 10 ps to 2^{62} ns. Output levels are adjustable between 1 V, 3.3 V and 5 V compatible.

PULSE/DELAY GENERATOR:

- Adjustable pulse width: 5 ns to 2^{62} ns
- Adjustable pulse delay: 10 ps to 2^{62} ns
- Width resolution:
 - > 2 ns for pulse width: 5 to 510 ns
 - > 5 ns for pulse width: 511 ns to 2^{62} ns
- Delay resolution: 10 ps
- Jitter:
 - > <80 ps RMS up to 100 nsec
 - > <200 ps RMS up to 500 nsec
 - > 1.5 ns RMS otherwise

STANDALONE GENERATOR:

- Rate up to 20 MHz
- Programmable duty cycle

EXT/INT CLOCK SYNCHRONIZER:

- Pulse picking up to 200 MHz input / 20 MHz output

BURST/GATE GENERATOR:

- 1 to 10^9 pulses (burst)
- Adjustable trig to burst delay
- Intra burst resolution (internal source): 5 ns
- External or internal source generator
- External or software trigger/gate


VOLTAGE LEVEL CONVERTER:

- Rate: up to 150 MHz
- Input Voltage: 30 mV to 3.3 V
- Adjustable output level: 1 V/3.3 V/5 V_TTL
- <30 psec Jitter

FREQUENCY DIVIDER/PRESCALER:

- 200 MHz maximum input freq
- Division by 1 to 10^9

GUI control software:

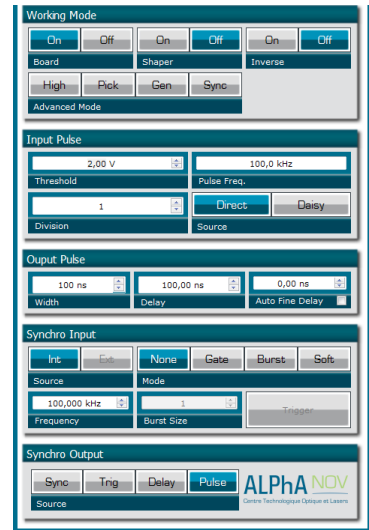

TECHNICAL SPECIFICATIONS

Electrical:

Pulse_Out Outputs (SMA connector)	
Output Impedance	50 Ω recommended coupling
Adjustable output level	1 V/3.3 V/5 V_TTL
Rise time	2 ns typical
Max output rate	20 MHz

Pulse_In (SMA connector)	
Input voltage	0 to 3.3 V
Threshold	0-3.3 VDC software adjustable (Pulse In)
Max Input rate	200 MHz
Insertion delay	70 ns

Sync Ext/Gate Inputs (SMA connector)	
Input voltage	0 to 3.3 V
Threshold	1.2 V
Max input rate	20 MHz

General:

Power voltage/current	+5 VDC/500 mA (charger included)
	USB 2.0 (cable included)
Stackable units	Multiple channel setup using several units (single USB/single power supply/single synchronization input signal)

Mechanical:

