
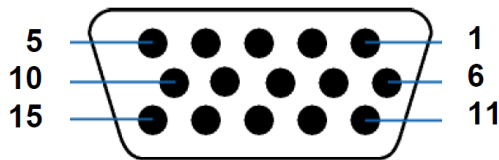
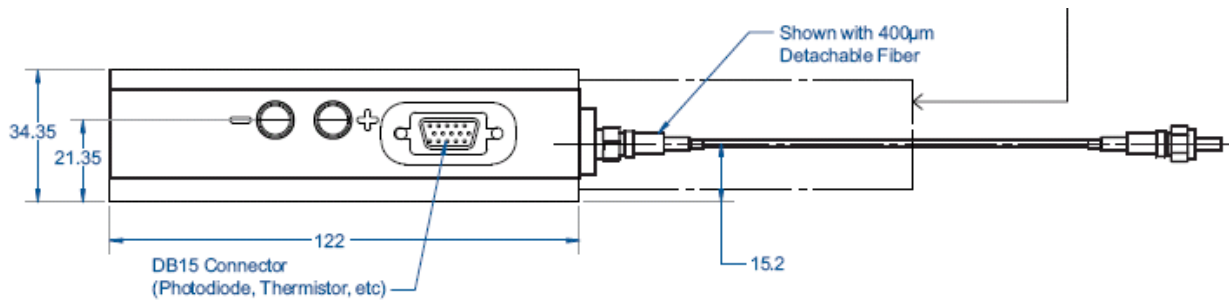


Item Number: 6315-0003**Item Description: 1532nm wavelength stabilized, 25W, 200um fiber coupled module**

Parameter	Units	Minimum	Typical	Maximum
Optical				
CW Output Power from Fiber	W	25		
Center Wavelength	nm	1530	1532	1534
Spectral Width (FWHM)	nm			2
Fiber Core Diameter	µm		200	
Fiber NA	-		0.22	
Temperature tuning coefficient	nm/°C		0.12	
Electrical (FCA)				
Operating Current (I _{OP})	A		33	40
Operating Voltage (V _{OP})	V		3.6	3.8
E-O conversion efficiency	%		20	
Thermal				
Operating Temperature	°C	20	22	25
Storage Temperature	°C	-20		70
Mechanical				
Module dimensions	mm		122 x 100 x 34.4	
Fiber length	m		2	
Fiber Input connector	-		HPSMA 905	
Thermistor				
Type	-		NTC	
Resistance at 25°C	KΩ		10	
Optional Monitoring Photo Diode				
Output signal at full power	µA	50		250
Control signal				
Interfacing	DB-15 connector at module back wall			

Notes

1. Specified performance to be tested at 22C module base temperature
2. Non-condensing operating environment required

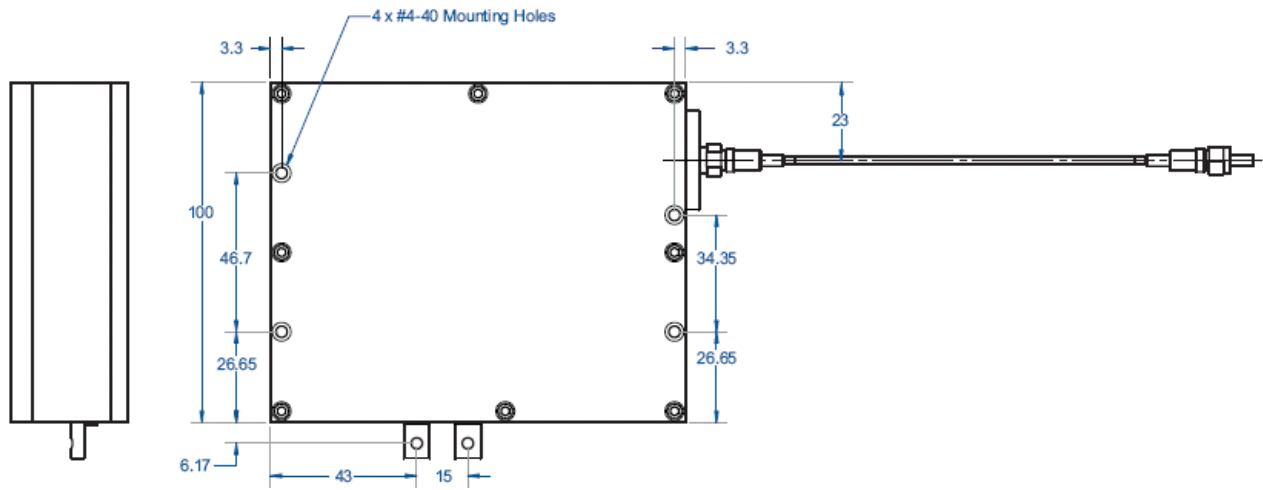

Pin number	Assignment
1	Thermistor
2	Thermistor
3	Not used
4	Not used
5	Monitor Photodiode +
6	Monitor Photodiode -
7	Not used
8	Not used
9	Not used
10	Not used
11	Not used
12	Not used
13	Not used
14	Not used
15	Not used

