


FCPA DX μ Jewel Series

Product Features

- Custom-fit pulse energy and average powers
- Burst Mode capable
- Pulse Select: Allows users to select up to 15 pre-set repetition rate values; typical rates range from 100 kHz to 5 MHz
- Pulse On-Demand: single pulse to standard pulse repetition rate
- Optional SHG module
- Remote diagnostic testing and in-field configuration
- Mechanical reliability complies with relevant MIL-STD-810F and IEC 60601-1 requirements

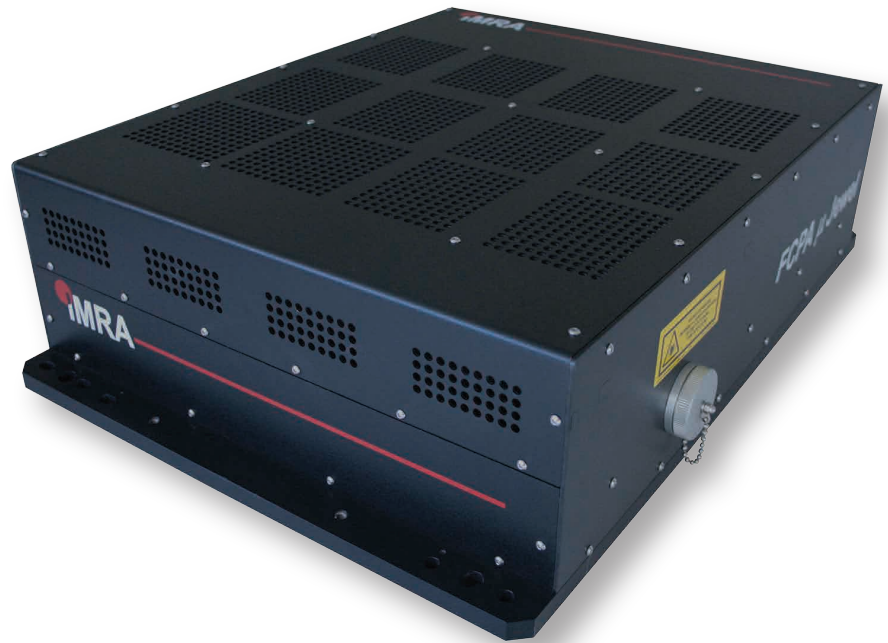

Applications

- Glass Welding
- Wafer Processing
- Thin Film Ablation
- Marking
- Microprocessing
- Ceramic Processing

Typical Configurations*

	DX0210	DX0320	DX0540
Wavelength	1045 nm		
Average Power (max)	≥ 2 W	≥ 3 W	≥ 5 W
Pulse Energy (max)	≥ 10 μ J	≥ 20 μ J	≥ 40 μ J
Standard Repetition Rate	100 kHz	100 kHz	100 kHz
Pulse Duration	≤ 450 fs		

*Other configurations available for specialized and OEM applications, e.g. higher average power, higher pulse energy, other repetition rate

DX Specifications	
Beam Quality	$M^2 \leq 1.3$
Polarization	Horizontal with respect to baseplate
Power Stability	$\leq 1\%$ RMS after stabilization over $\pm 1^\circ\text{C}$
Output Aperture Height	55.4 mm
Laser Head Dimensions	550 x 400 x 149 mm ³
Laser Head Weight	≤ 25 kg
Head Heat Dissipation	Max. 80 W
Controller Dimensions	433 x 483 x 222 mm ³
Controller Weight	≤ 30 kg
Power Consumption	≤ 600 W
Operating Voltage	100-120/200-240 VAC
Output Trigger	+3V, 100 ns wide, 150 ns before optical pulse
Operating Temperature	20 - 30 °C
Storage Temperature	0 - 50 °C
Warm-up Time	≤ 60 minutes
Cable Length	3 m



DX-Series Warning Label



NOTE: Specifications and features may change without notice

IMRA America, Inc.

1044 Woodridge Ave., Ann Arbor, MI 48105 Phone: 734.930.2560 Fax: 734.930.9957

lasers@imra.com

www.imra.com