



*High Quality
Professional Scopes*

8 Center Parkway, Plainfield, CT 06374
1 (860) 963.1141 - 1 (800) 4.SCOPE



Please Select from the following menu options:

[Expand All](#) | [Collapse All](#)

[Home](#)

[Products](#)

[By Industry](#)

[By Scope](#)

- FSM 10-2 x 36 Fierscope
- IVS 10-4 x 20 Video Scope
- FS 8 x 40 Fiberscope
- FS 6 Fiberscope
- FS 312 Fiberscope
- FS 3 Fiberscope
- FS 120 FIBERSCOPE
- FS 75 Flexible Mining Scope
- FSR 078 Microborescope
- FS 350 Illuminated Viewer
- FS 066 Fiberscope
- IG 350 Flexible viewer
- FSR 039 Microborescope
- VFS 13.7 x 300 cm Fiberscope
- VFS 8-4 x 135 cm Fiberscope
- VFS 6.5-4 x 135 cm Fiberscope
- VFSR 2.0 Fiberscope
- VFS 1.7 Fiberscope

[US Market Price Lists](#)


[Custom Scopes](#)

[Specification Sheets](#)

[Contact Us](#)

FS 120 FIBERSCOPE

The FS 120 was designed to be a portable, rugged inspection device capable of producing a high resolution image of critical components through access holes as small as 3.0 mm. With intense fiber optic illumination and a crisp image delivered by high resolution quartz optical fiber, this microborescope is able to handle a host of inspection requirements where there is limited access.

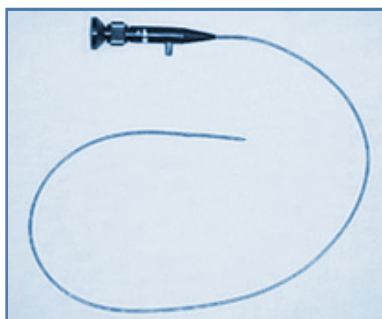

FS 120 Fiberscope


Standard System Includes:

- High Resolution Fiber Imaging Bundle
- Portable LED Battery Handle -1 Watt
- Custom Foam Lined Carrying Case

Options:

- 150 Watt Illuminator (FO-150)
- Flexible Light Guide
- 35 mm/Digital Still Camera Adapter
- "C" Mount Video Camera Adapter
- "C" Mount Video Camera and Monitor
- Right angle Viewing Adapter


Shaft O.D.	Bend Radius	Shaft Construction	Shaft Length	Field of View	Depth of Field	Eyepiece Type	Direction of View
.120 in. (3 mm)	1.5 in. (38 mm)	Braided Stainless Steel	24 in. (61 mm) STD 36 in. (91 cm) STD Custom Lengths Available	50° STD 70° available	.2 in. to 3.0 in. (5 mm to 75 mm)	B-Style, Diopter Adjustable and Photo Capability	Forward Viewing STD Right Angle Viewing with Adapter



Picture of scope in use



Appropriate picture



Appropriate Picture