

Fused Silica Transmission Gratings for NIR

High-Efficiency Gratings customized for your application




COMPANY STORY

Our inspiring story began in 2015 in Jena, Germany. Gitterwerk GmbH is a start-up company that is purely run by enthusiastic pioneers, we are simply your BEST partner for high quality diffraction gratings with world-renowned efficiencies.

What drives us? Team spirit, mutually growing passion for perfection, and last but not least our strong desire to positively contribute to shaping the future of the Laser market. We are proud to say that Gitterwerk's cornerstone is its people, that is why we are committed to maintaining a respectful, open-minded, and encouraging work environment.

So, the real question is, are you ready to become part of our story?

- ✓ TOP CONDITIONS
- ✓ HIGH QUALITY GRATINGS
- ✓ HIGH AVAILABILITY
- ✓ INDIVIDUAL GRATING DESIGN

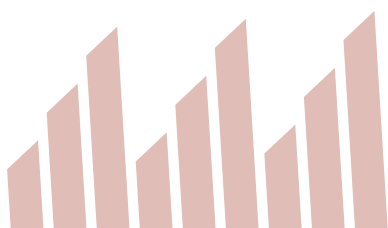

Gitterwerk GmbH
Moritz-von-Rohr-Str. 1a
07745 Jena
Thuringia, Germany

phone: +49 3641 3161120
email: info@gitterwerk.com
web: www.gitterwerk.com




OPTICAL SPECIFICATIONS

Graph annotations	a	b	c	d	e	f	g	h
Central wavelength [nm]	1150	1150	1240	1240	1320	1320	1450	1450
Grating period [nm]	725	1000	725	1000	833	1000	833	1250
Line density [l/mm]	1379.3	1000.0	1379.3	1000.0	1200.5	1000.0	1200.5	800.0
Polarization	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)
Angle of Incidence	52.5°	35.1°	58.8°	38.3°	52.4°	41.3°	60.5°	35.5°
Diffraction efficiency (≥)*	97.5 %	97.5 %	97.5 %	97.5 %	97.5 %	97.5 %	97.5 %	97.5 %
Angular dispersion [°/nm]	-0.130	-0.070	-0.152	-0.076	-0.113	-0.083	-0.140	-0.056

* at the central wavelength, including AR coating

TRANSMISSION GRATINGS NIR

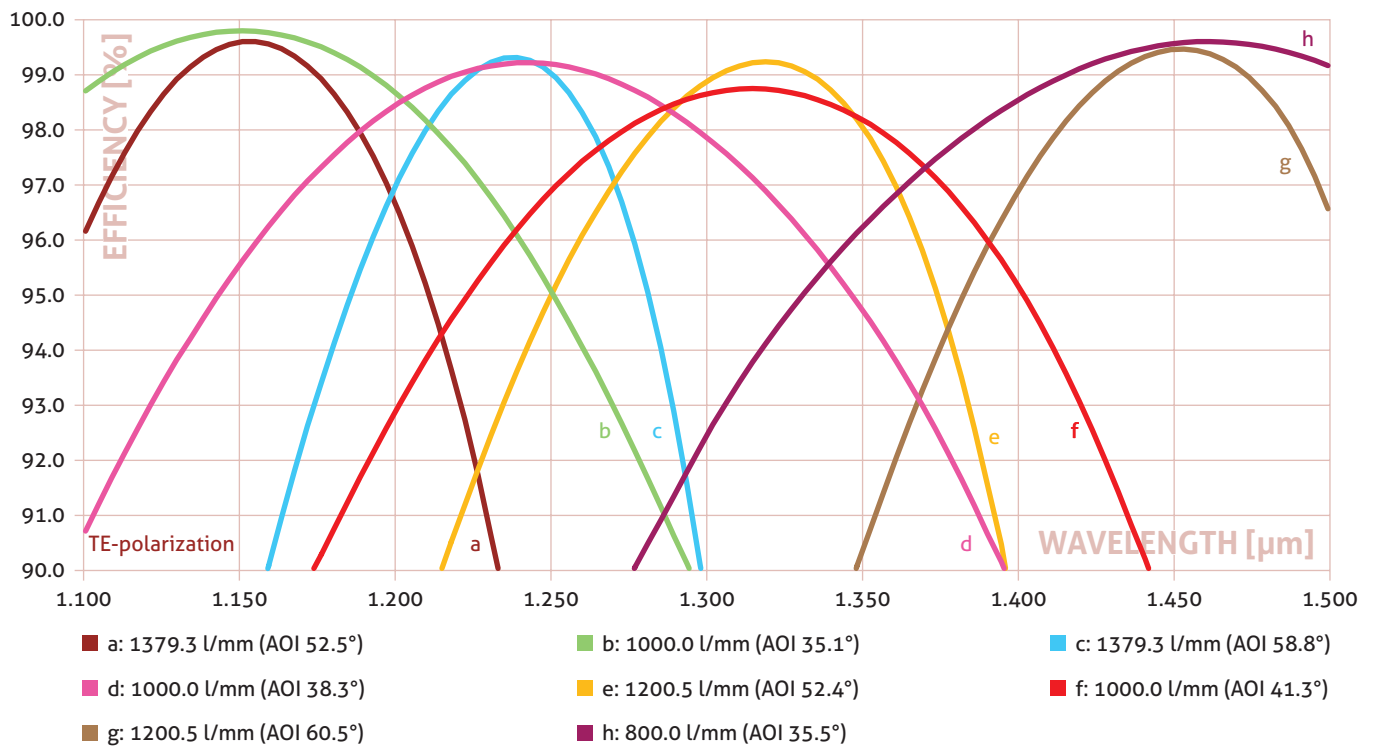

SUBSTRATE / MECHANICAL SPECIFICATIONS

Substrate material	Fused silica: Heraeus Suprasil 3002**					
Substrate thickness [mm]	Popular formats W x H [mm x mm]***					
6.35	135 x 20	100 x 15	77 x 15	30 x 20	17 x 15	
3.00	65 x 25	55 x 25	30 x 25	35 x 20	20 x 14	

** with reduced OH content of < 1 ppm

*** customizable to meet your specific demands

