

# Fused Silica Transmission Gratings for VIS

High-Efficiency Gratings customized for your application




## COMPANY STORY

Our inspiring story began in 2015 in Jena, Germany. Gitterwerk GmbH is a start-up company that is purely run by enthusiastic pioneers, we are simply your BEST partner for high quality diffraction gratings with world-renowned efficiencies.

**What drives us?** Team spirit, mutually growing passion for perfection, and last but not least our strong desire to positively contribute to shaping the future of the Laser market. We are proud to say that Gitterwerk's cornerstone is its people, that is why we are committed to maintaining a respectful, open-minded, and encouraging work environment.

So, the real question is, are you ready to become part of our story?

- ✓ TOP CONDITIONS
- ✓ HIGH QUALITY GRATINGS
- ✓ HIGH AVAILABILITY
- ✓ INDIVIDUAL GRATING DESIGN

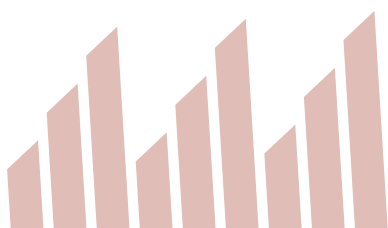

Gitterwerk GmbH  
Moritz-von-Rohr-Str. 1a  
07745 Jena  
Thuringia, Germany

phone: +49 3641 3161120  
email: [info@gitterwerk.com](mailto:info@gitterwerk.com)  
web: [www.gitterwerk.com](http://www.gitterwerk.com)




## OPTICAL SPECIFICATIONS

Graph annotations	a	b	c	d	e
Central wavelength [nm]	450	532	600	650	750
Grating period [nm]	400	400	543	625	725
Line density [l/mm]	2500.0	2500.0	1841.6	1600.0	1379.3
Polarization	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)	TE (s-pol.)
Angle of Incidence	34.2°	41.7°	33.5°	31.3°	31.1°
Diffraction efficiency (≥)*	96.5 %	96.5 %	96.5 %	96.5 %	96.5 %
Angular dispersion [°/nm]	-0.173	-0.192	-0.127	-0.107	-0.092

\* at the central wavelength, including AR coating

## TRANSMISSION GRATINGS VIS

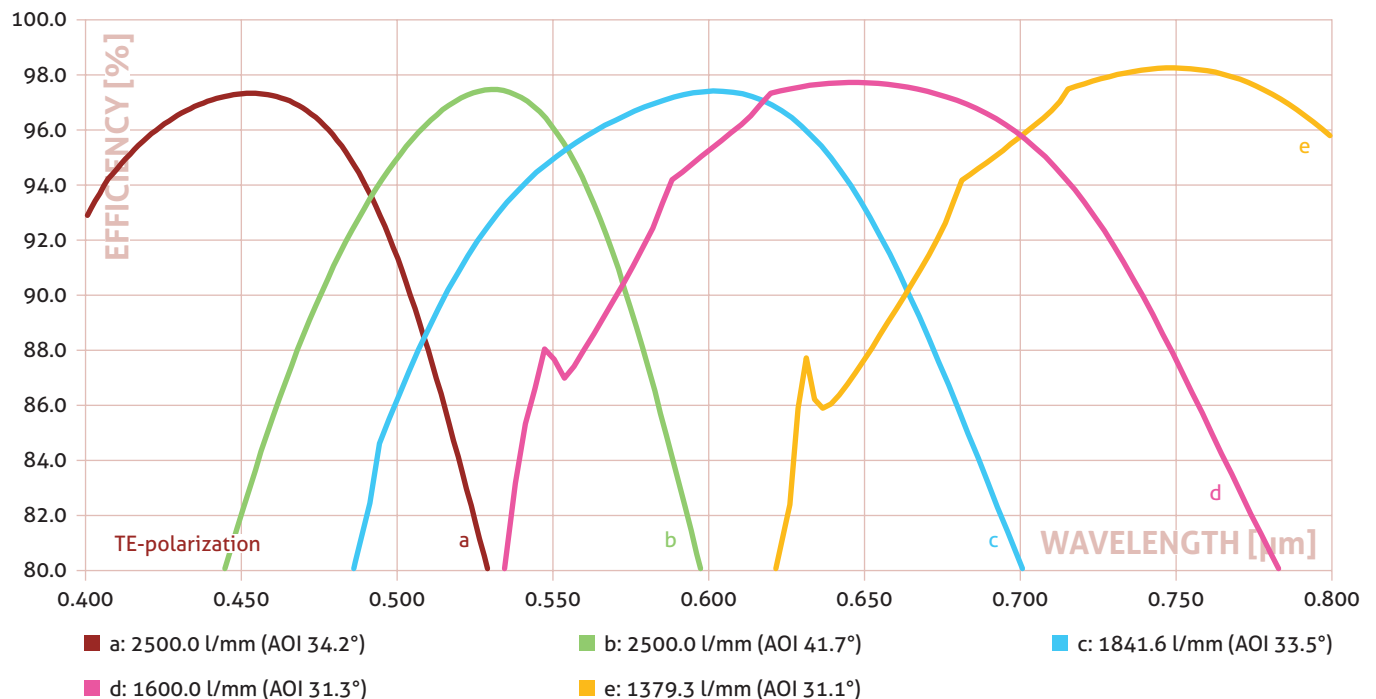

## SUBSTRATE / MECHANICAL SPECIFICATIONS

Substrate material	Fused silica: Heraeus Suprasil 3002**					
Substrate thickness [mm]	Popular formats W x H [mm x mm]***					
6.35	135 x 20	100 x 15	77 x 15	30 x 20	17 x 15	
3.00	65 x 25	55 x 25	30 x 25	35 x 20	20 x 14	

\*\* with reduced OH content of < 1 ppm

\*\*\* customizable to meet your specific demands

