




# Label LASER LABEL FINISHER Express



## The Fastest Digital Laser Finisher in its Class

GCC digital laser finishers with contactless laser beam handles die cutting, kiss cutting, bridge cutting and lamination (optional). Along with the automatic laminating, winding/unwinding system, waste removal roll, CCD camera and slitting modules, LabelExpress offers completed digital and automatic solution for roll label cutting. No extra tooling expense and waiting time needed, ultimate flexibility to fulfill dynamic market demands.

### LabelExpress with Laminator System

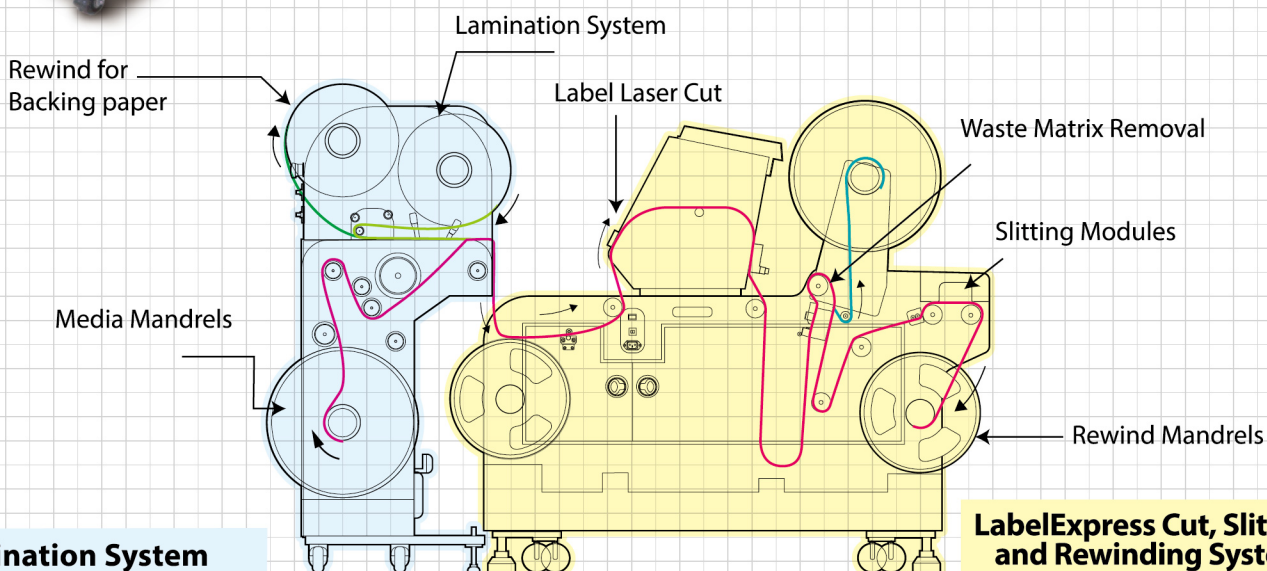

Lamination System


LabelExpress Cut, Slitting and Rewinding System



CCD Camera



Bridge Cutting

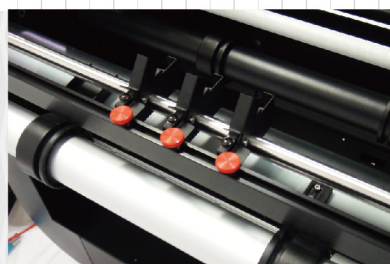

Slitting Module (Optional)



Kiss Cutting

## Features:

- Automatic winding / unwinding system
- Emergency stop
- Down vacuum to hold materials flat for laser cutting
- CCD camera to perform precise contour cutting
- Beam path with dust protection window to minimize maintenance
- Edge guiding module to keep materials consistently feeding
- Top vacuum to take out debris and exhaust during laser cutting
- Reliable steel drum material driven technology
- Built-in LED light to illuminate working space
- Air assist to protect lens of laser carriage

# LabelExpress LASER LABEL FINISHER

Model Number		LE15-20V93	LE15-30V
Wattage		20W 9.3-μm	30W 10.6-μm
Cutting Width		381 mm (15")	
Work Area (Sheet) (W x L)		381 x 500 mm (15" x 19.7")	
Max. Label Graphic Size		381 x 330 (15" x 13")	
Max. Roll Material Size	Width	400 mm (15.7")	
	Roll Size	76.2 mm (3") core with 300 mm (11.8") diameter	
	Roll Weight	25 kgs	
Laser Source		Sealed CO <sub>2</sub> Laser	
Drive		Closed-loop DC Servo Control	
Roll to Roll		Stepper motor Control	
Maximum Motor Speed		1,524 mm/s (60ips) (for straight line cutting)	
Speed Control		Adjustable from 0.1-100 % (Up to 16 color-linked speed settings per job)	
Power Control		Adjustable from 0-100 % (Up to 16 color-linked speed settings per job)	
Alignment System		CCD Module	
Distance Accuracy		0.254 mm or 0.1 % of move, whichever is greater	
Computer Interface		Standard USB port	
Operating Systems		MS Windows	
Display Panel		4-line LCD panel	
Paper Feeding		Auto feed sensor, re-winding system, paper alignment control, waste removal system	
Vacuum System		Down vacuum for media fixation	
		Top vacuum for media surface cleaning	
Process Materials		Paper, PET, PP, BOPP, etc.	
Safety		Class IV Laser Product Compliant with EN60825-1:2014 Class IV Laser Product Compliant with CDRH	
Dimensions (WxLxH)	Machine	1,070 x 1,441 x 1,180 mm (42.2 X 56.7 X 46.5 in.)	
	Shipping	1,570 x 1,300 x 1,470 mm (52 X 65.4 X 58 7 in.)	
Weight (WxLxH)	Machine	250 kg	
	Shipping	385 kg	
Facility Requirements			
Electrical		100~240 Volt AC, 50/ 60Hz, Auto Switching, Max. 10 Amp	
Power Consumption		MAX:1000W	
Optional (LabelExpress Laminator)			
Lamination Width		MAX: 380mm (15")	
Lamination Film (Outer Diameter)		MAX: 250mm (9.8"), with core 76.2mm (3")	
Media (Outer Diameter)		MAX: 300mm (11.8"), with core 76.2mm (3")	
Electric		100-240VAC, 50-60Hz, MAX. 5A	
Power Consumption		500W	
Lamination Type		Cold Lamination	
Media Type		Available with backing paper & without backing paper	
Speed		Depends on LabelExpress feeding speed	
Dimensions (WxLxH)	Machine	860 x 510 x 1,250 mm (34 X 20 X 49 in.)	
	Shipping	1,120 x 750 x 1,480 mm (44 X 30 X 58 in.)	
Weight (WxLxH)	Machine	140 kgs	
	Shipping	204 kgs	



\*Specifications are subject to change without prior notice.

[www.GCCworld.com](http://www.GCCworld.com)



GCC Headquarters	4F-1., No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan	886-2-6616-6692	Fax : 886-2-2694-6875
GCC China	No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China	86-512-5726-1515	Fax : 86-512-5726-1518
GCC Europe B.V.	Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands	31-10-458-9367	Fax : 31-10-451-9874
GCC America, Inc	20453 E Valley Blvd.Walnut, CA 91789, USA	1-909-718-0248	Fax : 1-909-718-0251
		US & Canada Only	Toll Free: 1-888-284-5211