


UP55M-500W-H12-D0

P/N 201882

Thermal detector for laser power measurement up to 500 W.

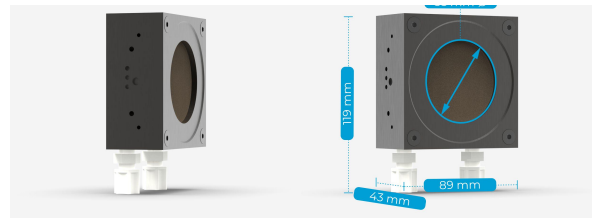

KEY FEATURES

MODULAR CONCEPT

Increase the power capability of your detector: 4 different cooling modules

HIGH PERFORMANCE

- Fast Rise Time (2 sec)
- High Damage Threshold (45 kW/cm²)

COMPACT DESIGN

Only 32 mm thick (40S model)

ENERGY MODE

Measure single shot energy up to 200 J

SMART INTERFACE

Containing all the calibration data

COMPATIBLE STAND

[STAND-S-443](#)

COMPATIBLE DISPLAYS & PC INTERFACES

[MAESTRO](#)

[TUNER](#)

[UNO](#)

[S-LINK-1](#)

[S-LINK-2](#)

[P-LINK \(USB\)](#)

[M-LINK](#)

[P-LINK \(RS-232\)](#)

[P-LINK-4 \(USB\)](#)

[P-LINK-4 \(Ethernet\) V2](#)

[S-LINK-1 \(Ethernet\)](#)

[S-LINK-2 \(Ethernet\)](#)

MEASUREMENT CAPABILITIES

Maximum average power (continuous) ¹	500 W
---	-------

Maximum average power (1 minute) ²	500 W
---	-------

Noise equivalent power ³	15 mW
-------------------------------------	-------

Spectral range ⁴	0.19 - 20 μm
-----------------------------	--------------

Typical rise time ⁵	2 sec
--------------------------------	-------

Typical power sensitivity ⁶	0.06 mV/W
--	-----------

Power calibration uncertainty ⁷	±2.5 %
--	--------

Repeatability	±0.5 %
---------------	--------

1. Minimum cooling flow 0.5 liters/min, water temperature ≤ 22°C, 1/8 NPT compression fittings for 1/4 inch semi-rigid tube. Contact Gentec-EO for clean deionized water cooling module option.

2. Minimum cooling flow 0.5 liters/min, water temperature ≤ 22°C, 1/8 NPT compression fittings for 1/4 inch semi-rigid tube. Contact Gentec-EO for clean deionized water cooling module option.

3. Nominal value, actual value depends on electrical noise in the measurement system.

4. For the calibrated spectral range, see the user manual.

5. With anticipation.

6. Into 100 kΩ load. Maximum output voltage = sensitivity x maximum power.

7. Including linearity with power.

MEASUREMENT CAPABILITIES (ENERGY MODE)

Typical energy sensitivity	0.015 mV/J
----------------------------	------------

Maximum measurable energy ¹	200 J
--	-------

Noise equivalent energy ²	0.25 J
--------------------------------------	--------

Minimum repetition period	12 s
---------------------------	------

Maximum pulse width	430 ms
---------------------	--------

Energy calibration uncertainty ³	±5 %
---	------

1. For 360 μ s pulses. Higher pulse energy possible for long pulses (ms), less for short pulses (ns).
2. Nominal value, actual value depends on electrical noise in the measurement system.
3. When single-shot energy calibration is purchased

DAMAGE THRESHOLDS

Maximum average power density ¹	45 kW/cm ²
--	-----------------------

Maximum energy density ²	1 J/cm ²
-------------------------------------	---------------------

Peak power density ³	143 MW/cm ²
---------------------------------	------------------------

1. At 1064 nm, 10 W CW.
2. At 1064 nm, 7 ns, 10 Hz.
3. At 1064 nm, 7 ns, 10 Hz.

PHYSICAL CHARACTERISTICS

Aperture diameter	55 mm
-------------------	-------

Absorber	H12
----------	-----

Dimensions	89H x 89W x 40D mm
------------	--------------------

Weight	0.81 kg
--------	---------