

CANTY

PROCESS TECHNOLOGY

LED SANITARY LIGHTING SYSTEM

Stainless Steel NEMA 4X Construction



5,000+ HOURS

LED LIFE, HIGH
INTENSITY UNIFORM
WHITE LIGHT OUTPUT

FEATURES

- Cold Light - Adds No Heat To Process
- Fused Glass - Safe Process Light
- Compact 1" - 4" Tri-Clamp® Design
- Fiber Optic Bundle Mount Options
- Integral or Remote Momentary Switch
- LED, low maintenance
- 316L S.S. Design Can Be C.I.P.
- Pressures Through 3,000 PSI available
- Process Temperatures From -320° F (-195°C) to 650° F (340°C) available
- Stainless Steel or Hastelloy® Wetted Materials. Consult Factory for Additional Options.
- Long service life
- Fiber Optic Technology

HOW IT WORKS

The LED lighting system is designed to illuminate bio reactors, fermentors and sanitary vessels. The LED light is a fused glass light which provides a high intensity, cold light source to allow the process to be viewed under a true white light (5000° K color temperature) while adding no heat to the process, which leads to no product bake-on. The LED lighting package provides a compact, cost effective lighting system to meet all of your sanitary process needs. Each Canty LED light uses a high pressure, high temperature fused glass hermetic seal to completely seal the light source from the process. The LED light can mate with a variety of couplings, including Tri-Clamp®, Tuchenhagen®, NA-Connect® or Sanitary.

STANDARD LIGHT SOURCE

All models feature 316L S.S. construction. A high output LED provides bright white light to illuminate the application. A momentary switch is provided either integral to the light, or with a 42" switch cord. A 25' (7.6 m) typical input power cable with cord grip is supplied, and can be wired to the appropriate power source.

APPLICATIONS

- BioTech Reactors, Fermentors and Sterilizers
- Sterile Process Vessels
- Aseptic Tanks
- Sanitary Areas and Glove Boxes
- Portable Tanks
- Freeze Dryers
- Many, many more

SPECIFICATIONS

Power Req:	24V DC, 100-277V AC
Housings:	NEMA 4X Sanitary, IP 66, 316L S.S. construction
Wetted Materials:	316L S.S., Hastelloy® C-276, C-22
Power supply:	Internal or remote
Approx. Size:	3" [76mm] diameter X 8" [203mm] long
Weight:	4.5 lb. [2 kg]

MOUNTING CONNECTION

Available in:

- Sightglass Mount - 12" + Fiber Optic Bundle
- 1" - 4" Tri-Clamp®, NA-Connect® Process Connection Options
- Consult Factory For Additional Options

All registered trademarks are the property of their respective owners.

CANTY

JM Canty Inc
JM Canty Intl Ltd




Buffalo, NY USA
Dublin, Ireland

Ph: (716) 625 4227
Ph: + 353 (01) 882 9621

Fax: (716) 625 4228
Fax: +353 (01) 882 9622

www.jmcanty.com

Document P/N: TA11500-1007 Rev. 7

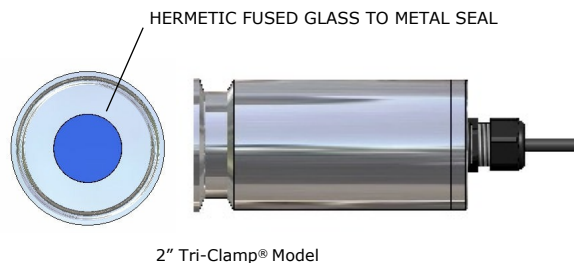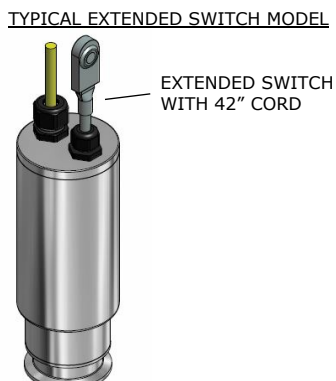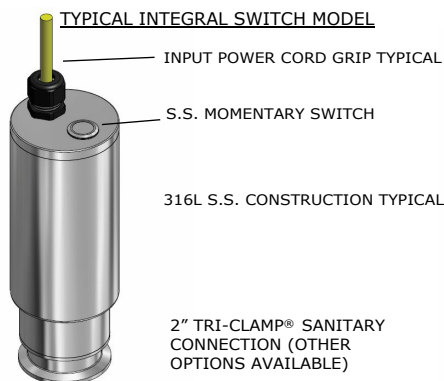

HOW TO ORDER: Select the appropriate symbols and build a part number as shown:

Direct Mount Ordering Information

EXAMPLE:

HHAS4F00-LED

SWITCH OPTIONS	TIMER OPTIONS
INTEGRAL MOMENTARY SWITCH (standard includes timer): S - 24 Volt DC input, 1 amp H - 120 Volt AC input, .25 amp R - 230 Volt AC input, .25 amp EXTENDED MOMENTARY SWITCH - 42" CORD (no timer): G - 24 Volt DC input, 1 amp P - 120 Volt AC input, .25 amp NO SWITCH (standard includes timer): 9 - 24 Volt DC input, 1 amp C - 120 Volt AC input, .25 amp B - 230 Volt AC input, .25 amp †Consult factory for 12V options.	0 - Includes timer (standard, except on model prefixes "HG" and "HP") 2 - No timer (for momentary use)
POWER SUPPLY OPTIONS	MOUNTING CONNECTION
A - Integral. User supplies voltage specified above direct to light per model number selected. †Consult factory for other options.	D - 1"/1.5" NA-Connect® Sanitary Connection E - 1"/1.5" Tri-Clamp® Sanitary Connection F - 2" Tri-Clamp®/NA-Connect® Sanitary Connection G - 3" Tri-Clamp®/NA-Connect® Sanitary Connection H - 4" Tri-Clamp®/NA-Connect® Sanitary Connection
WETTED MATERIAL	
S - 316L S.S.* D - Hastelloy® C-276 or equal* E - Hastelloy® C-22® or equal* U - Hastelloy® C-276 or equal, 20 Ra Electropolish finish 20 Ra mechanical finish standard. Additional finishes available.	

Fiber Mount Ordering Information


EXAMPLE:

HHA10S0-LED

SWITCH OPTIONS	TIMER OPTIONS
INTEGRAL MOMENTARY SWITCH (standard includes timer): S - 24 Volt DC input, 1 amp H - 120 Volt AC input, .25 amp R - 230 Volt AC input, .25 amp EXTENDED MOMENTARY SWITCH - 42" CORD (no timer): G - 24 Volt DC input, 1 amp P - 120 Volt AC input, .25 amp NO SWITCH (standard includes timer): 9 - 24 Volt DC input, 1 amp C - 120 Volt AC input, .25 amp B - 230 Volt AC input, .25 amp †Consult factory for 12V options.	0 - Includes timer (standard, except on model prefixes "HG" and "HP") 2 - No timer (for momentary use)
POWER SUPPLY OPTIONS	BUNDLE SHEATHING MATERIAL
A - Integral. User supplies voltage specified above direct to light per model number selected. †Consult factory for other options.	S - 304 SS Sheathing
BUNDLE LENGTH	
0 - 6" Rigid Bundle 1 - 24" Flex Bundle 2 - 36" Flex Bundle 3 - 48" Flex Bundle 4 - 60" Flex Bundle 5 - 72" Flex Bundle	
BUNDLE SELECTION	
1 - Single Leg Bundle 205° C Max at Tip.	



6" Rigid Bundle Model

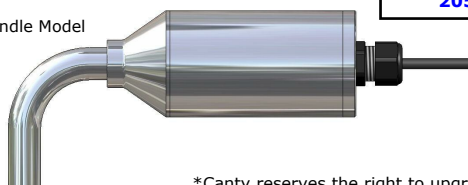

*Canty reserves the right to upgrade from Stainless Steel to the hastelloy C family of materials at no additional charge.

CANTY

JM Canty Inc
JM Canty Intl Ltd

Buffalo, NY USA
Dublin, Ireland

Ph: (716) 625 4227
Ph: + 353 (01) 882 9621

Fax: (716) 625 4228
Fax: +353 (01) 882 9622

www.jmcanty.com

Document P/N: TA11500-1007 Rev. 7

All registered trademarks are the property of their respective owners.