

IDS NXT rome RS18064C (AS00018)




Specification

- PRELIMINARY -

Sensor

Sensor type	CMOS Color
Shutter	Rolling shutter
Sensor characteristic	Linear
Readout mode	Progressive scan
Pixel Class	6 MP
Resolution	6.41 Mpix
Resolution (h x v)	3088 x 2076 Pixel
Aspect ratio	3:2
ADC	12 bit
Color depth (camera)	12 bit
Optical sensor class	1/1.8"
Optical Size	7.411 mm x 4.982 mm
Optical sensor diagonal	8.93 mm (1/1.79")
Pixel size	2.4 μ m
Manufacturer	Sony
Sensor Model	IMX178LQJ-C
Gain (master/RGB)	14.5x/5x
AOI horizontal	same frame rate
AOI vertical	increased frame rate
AOI image width / step width	88 / 8
AOI image height / step width	2 / 2
AOI position grid (horizontal/vertical)	8 / 2
Binning horizontal	-
Binning vertical	-
Binning method	-
Binning factor	-
Subsampling horizontal	same frame rate
Subsampling vertical	same frame rate
Subsampling method	M/C automatic
Subsampling factor	2, 4, 8

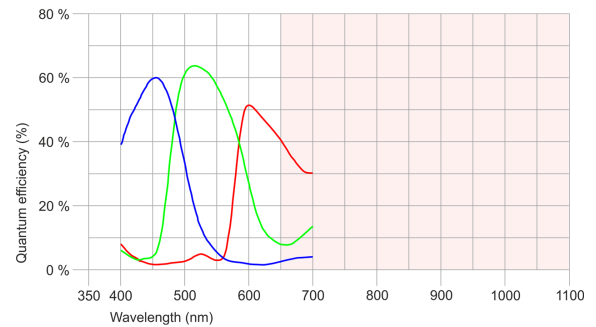

Subject to technical modifications (2020-03-23)

IDS NXT rome RS18064C (AS00018)

Model

Frame rate freerun mode	18
Frame rate trigger (continuous)	9.0 fps
Frame rate trigger (maximum)	9.0 fps
Exposure time (minimum - maximum)	0.031 ms - 2000 ms
Long exposure (maximum)	120000 ms
Power consumption	1.8 W - 2.7 W
Image memory	128 MB
Special features	IDS line scan mode, Sensor source gain

Ambient conditions

The temperature values given below refer to the outer device temperature of the camera housing.


Device temperature during operation	0 °C - 55 °C / 32 °F - 131 °F
Device temperature during storage	-20 °C - 60 °C / -4 °F - 140 °F
Humidity (relative, non-condensing)	0 % - 80 %

Connectors

Interface connector	GigE M12, screwable
I/O connector	12-pin M12 connector (Attend 216A-12MSR)
Power supply	12 V - 24 V or PoE

Pin assignment I/O connector

1	Power supply 12-24 V DC (VBUS)
2	Reference level (ground) for power supply and RS-232 (VBUS GND)
3	Trigger input with optocoupler (Opto IN 0)
4	Input 1 with optocoupler (Opto IN 1)
5	Common reference level for all Opto IN (Opto IN COM)
6	Common reference level for all Opto OUT (Opto OUT COM)
7	Output 1 with optocoupler (Opto OUT 1)
8	Output 2 with optocoupler (Opto OUT 2)
9	Serial interface (RS232 Rx/D)
10	Serial interface (RS232 Tx/D)
11	Input 2 with optocoupler (Opto IN 2)
12	Flash output with optocoupler (Opto OUT 0)



Camera rear view

Design

Lens Mount	C-Mount
IP code	IP65/67
Dimensions H/W/L	41.0 mm x 53.0 mm x 75.0 mm
Mass	281 g