




IRCameras

IRC806 MID WAVE INFRARED CAMERA

The technologically advanced IRC806 science grade camera utilizes an Indium Antimonide (InSb) focal plane array (FPA) and provides unmatched sensitivity and ultra-low noise imagery with no blooming or crosstalk. The IRC806 operates at up to 119 frames per second full frame, (475 Hz full frame with HS) and supports sub windowing for even higher frame rates.


The IRC806 features 640 x 512 pixel resolution at full window size, and includes Camera Link, Gigabit Ethernet and HDMI outputs. The IRC806 is the perfect choice for the most demanding MWIR imaging applications including materials evaluation, quality assurance and spectroscopy.

Using the cost effective LN2 cooled Dewar assembly, the IRC806 infrared camera consumes low power and has no vibration due to cryocoolers. The IRC806 offers easily changed cold filters and apertures making it perfect for prototyping system development or where application requirements may change. Software options include WinIRC and a software developers kit to allow the user to acquire, display and analyze data from the IRC806 high definition camera.



CAMERA CAPABILITIES

- 640 x 512 LN2 cooled InSb sensor
- <math><1 \mu\text{m}</math> to $>5 \mu\text{m}$ spectral range
- NE Δ T <math><20 \text{ mK}</math>
- 119 Hz full window frame rate (475 Hz HS)
- Motorized four position warm filter wheel option
- Simultaneous CameraLink, GigE & HDMI outputs

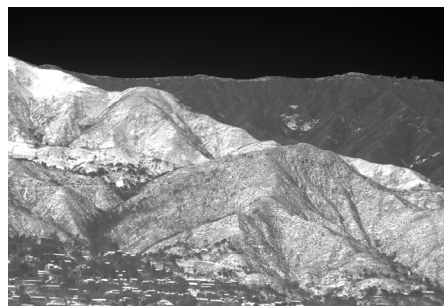

IRCameras, LLC • Santa Barbara, CA • 805.965.9650 • sales@ircameras.com

Specifications/features subject to change without notice

The products described by this document may require an export license for shipments outside of the United States. IRCameras must be notified at the time of order if the product will be exported so that an appropriate export license may be obtained.

DETECTOR	IRC806	IRC806HS
Detector type	Indium Antimonide (InSb)	
Spectral response	<1.0 μm to 5.3 μm	
Resolution (pixels)	640 x 512	
Pixel pitch	20 μm	12 μm
IMAGING ELECTRONICS		
Frame rate @ max window size	119 Hz	475 Hz
Integration time	<150 ns to full frame time	
Dynamic range	14-bit with 13-bit option to increase frame rate at small window sizes	
Windowing	User defined in 4 x 1 increments; min width = 320, min height = 8	
Integration type	Snapshot, automatic selection of integrate while read or integrate then read	
Ultra low latency sync	Sync I/O, integration out	
Image data	Simultaneous Camera Link, GigE & HDMI	
Communications	Serial over Camera Link & GigE	
Software control	Cross platform GenICam compliant	
Image data stamp	Optional IRIG, GPS with on-board receiver	
PERFORMANCE		
NEdT	<20 mK	<30 mK
Well capacity (electrons)	7 M	2 M
Operability	99.8%	99.6%
LN2 hold time	>8 hours typical, >4 hours with optional cold filter wheel	
OPTICS		
Camera f/#	f/2.3 & f/4.0 standard; custom coldshields available on request	
Cold filter	3.0 μm - 5.0 μm or no cold filter standard, optional CO ₂ , SWIR or custom filters on request	
Lens mount	Bayonet for 7, 13, 25, 50, 100 & 50/250 mm lenses; bolt hole pattern for non-standard lenses	
Optional filter wheel	Motorized four position cold filter wheel; 25.4 mm diameter x 1.0 mm thick filters	
GENERAL		
Power @ 24 VDC	12 W	
System weight	<7 pounds	
Size	3.7" x 8.1" x 11.8"	
Operating temperature range	-40° C to +55° C (-40° F to +131° F)	
Storage temperature range	-55° C to +80° C (-67° F to +176° F)	
Environmental rating	IP-51	
Mounting holes	4 x 1/4-thru & 1 x 1/4-20	