



ИНЖЕКТ^Q

*Menu*Primary Menu

[HOME](#)

[ABOUT US](#)


[PRODUCTS](#)

[NEWS](#)

[FOR SUPPLIERS](#)

[CONTACTS](#)

[RU/EN](#)

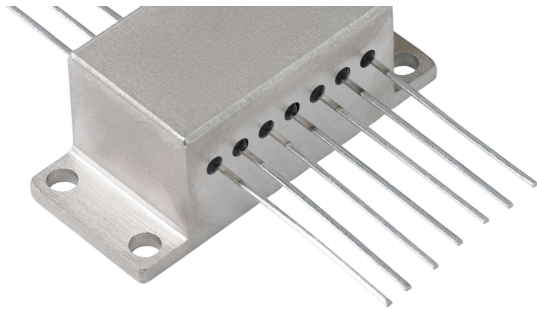

multimode fiber

- » Low coherence
- » Built-in photodiode feedback, thermistor, thermoelectric cooler

APPLICATION:

- » Optical fiber gyroscopes and sensors
- » Low Coherence Optical Tomography
- » Optical communication
- » Optical measuring systems

[PREVIOUS PRODUCT](#)

POM-SL 2-2

[NEXT PRODUCT](#)

LM4-850

Description

Parameter	Min	normal	max	Units
Radiation power at the output of a fiber optic fiber		8		mW
Length of optical fiber		0.5		m




Инжект^Q

MenuPrimary Menu


[HOME](#)[ABOUT US](#)[PRODUCTS](#)[NEWS](#)[FOR SUPPLIERS](#)[CONTACTS](#)[RU/EN](#)

Ambient temperature range	-40	60	°C
Optical fiber type	MM 50/125 or 62.5/125		
Diameter of the optical fiber glass sheath	125		µm
Diameter of plastic sheath	0.9		µm
Fiber Optic Connector	FC/PC или FC/APC, ST, SC		
Operating mode	continuous, pulse		

Related products



LM4-850



LM4-850D



Инжект^Q

MenuPrimary Menu

[HOME](#)[ABOUT US](#)[PRODUCTS](#)[NEWS](#)[FOR SUPPLIERS](#)[CONTACTS](#)[RU/EN](#)

[About us](#)[Products](#)[News](#)[For suppliers](#)[Contacts](#)

PRODUCT CATEGORIES

[Recruitment gratings of laser diodes for quasi-continuous operation](#)[Semiconductor lasers in pulse mode](#)[Superluminescent diodes](#)[Photodetectors](#)[Other](#)

CONTACTS

410052, Russia, Saratov,

st. Elmashevskaya, 3a

Phone: +7 8452-659707

Fax: +7 8452-437115

E-mail: info@nppinject.ru