







- 21 mm total height
- 0.02° repeatability
- 4 mm aperture
- 50 N load capacity
- Worm gear driven for continuous rotation
- Built-in controller; daisy-chains with other Zaber products
- Encoder position feedback with slip/stall detection and automatic recovery

Product Description

Zaber's X-RSM-E Series rotation stages are our most compact stepper and worm gear driven devices. These are stand-alone units requiring only a power supply. An indexed knob provides convenient manual control for versatile operation even without a computer. These stages connect to the RS-232 port or USB port of any computer, and they can be daisy-chained with any other Zaber products. The daisy-chain also shares power, making it possible for multiple X-Series products to share a single power supply.

Self-aligning feet and mounting points make it easy to set up multi-axis tilt or gimbal systems using the GSM tilt devices or AP146 and AB147 brackets.

Dimension Drawings

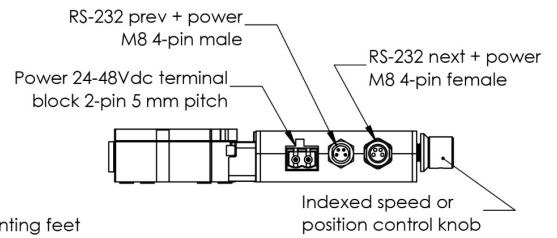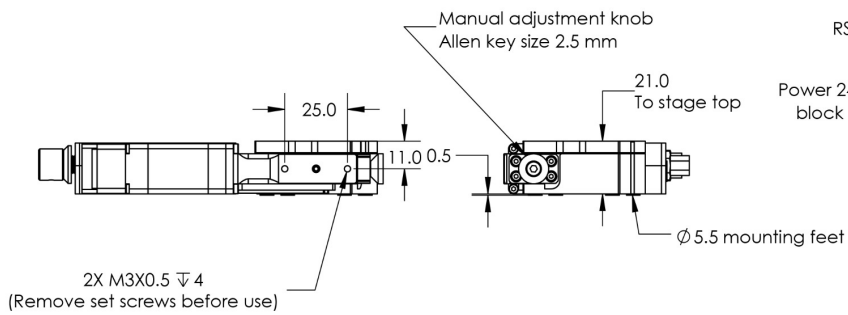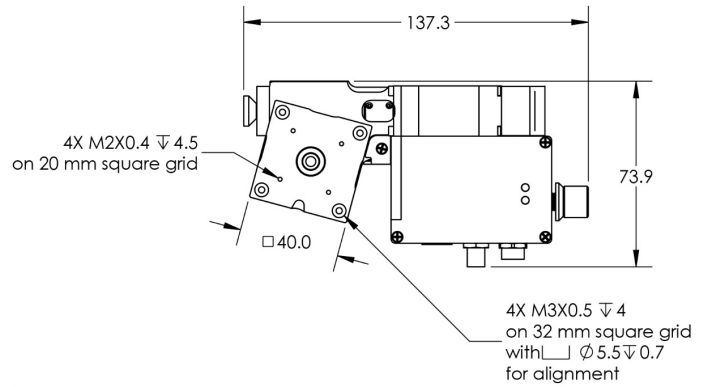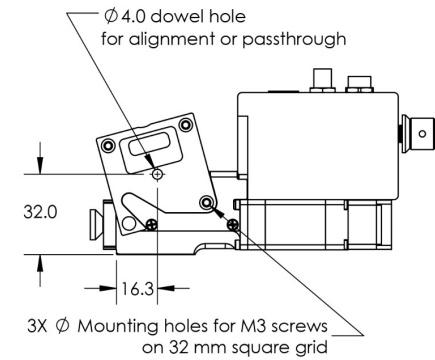

Product Specifications

Specification	Value	Alternate Unit
Microstep Size (Default Resolution)	0.00046875°	8.181 μrad
Built-in Controller	Yes	
Range	360°	
Accuracy (unidirectional)	0.14°	2.443000 mrad
Repeatability	< 0.02°	< 0.349 mrad
Backlash	< 0.04°	< 0.698 mrad
Maximum Speed	120 °/s	20.0 rpm
Minimum Speed	0.000286 °/s	4.992 μrad/s
Encoder Resolution	200 CPR	800 states/rev
Encoder Type	Motor mounted rotary quadrature encoder	
Communication Interface	RS-232	
Communication Protocol	Zaber ASCII (Default), Zaber Binary	
Maximum Continuous Torque	60 N·Å c m	85.0 o z"Å i n
Maximum Centered Load	50 N	11.2 lb
Maximum Cantilever Load	100 N·Å c m	141.6 o z"Å i n
Stage Top Dimension	40 mm	1.575 "
Maximum Current Draw	350 mA	
Power Supply	24-48 VDC	
Power Plug	2-pin Screw Terminal	
Motor Steps Per Rev	200	
Motor Type	Stepper (2 phase)	
Inductance	3.5 mH/phase	
Default Resolution	1/64 of a step	
Data Cable Connection	Locking 4-pin M8	
Motor Frame Size	NEMA 08	
Mechanical Drive System	Precision Worm Gear	
Limit or Home Sensing	Magnetic home sensor	
Manual Control	Yes	
Mounting Interface	M2 and M3 mounting holes	
Vacuum Compatible	No	
Operating Temperature Range	0-50 °C	
RoHS Compliant	Yes	

Specification	Value	Alternate Unit
CE Compliant	Yes	
Weight	0.278 kg	0.613 lb

Specification Charts

Torque Speed Performance

