

Nd:YVO₄ Nd-doped YVO₄



DESCRIPTION

Nd-doped YVO₄ crystal is an excellent laser crystal for making the diode-pumped solid lasers. The main and greatest advantages of Nd: YVO₄ are high absorption coefficient, big stimulated emission cross-section and wide absorption band, the absorption peak is about 808 nm. Because of these advantages, small crystal can be used to make smaller laser device. The another feature of Nd: YVO₄ crystal is this uniaxial, which makes it emit linearly polarized lights. Combining with frequency-doubled crystal, all-solid-state lasers with green, blue and red wavelength can be realized.

APPLICATIONS

- 457nm laser
- Holography
- 671nm laser
- Military field
- Medical test
- Materials processing
- Laser printing

FEATURES

- High absorption coefficient
- Large stimulated emission cross-section
- Wide absorption bang
- High damage threshold
- Uniaxial crystal
- Good physical and optical property

PARAMETERS

PHYSICAL AND CHEMICAL PROPERTIES

Property	Value
Crystal Structure	Zircon Tetragonal, space group D4h-14/amd
Lattice Constants	a=b=7.12, c=6.29
Density	4.22g/cm ³
Melting Point	1825
Absorption Coefficient	1.0 cm ⁻¹ ~ 7 cm ⁻¹
Thermal Conductivity /(W·m ⁻¹ ·K ⁻¹ @25°C)	5.2
Thermal Optical Coefficient(d _n /dT)	dn _o /dT=8.5×10 ⁻⁶ /K dn _e /dT=2.9×10 ⁻⁶ /K
Thermal Expansion /(10 ⁻⁶ ·K ⁻¹ @25°C)	a = 4.43, c= 11.4
Hardness (Mohs)	4-5



Nd:YVO₄ Nd-doped YVO₄



MATERIAL AND SPECIFICATIONS

Property	Value
Concentration Tolerance (atm%)	0.5%, 1.1%, 2.0%, 3.0%
Orientation	A-cut or C-cut
Parallelism	20"
Perpendicularity	5´
Surface Quality	10/5
Wavefront Distortion	< $\lambda/8$ @633nm
Surface Flatness	$\lambda/10$ @ 633 nm
Clear Aperture	>90%
Chamfer	$\leq 0.2\text{mm}@450$
Dimension Tolerance	(W $\pm 0.1\text{mm}$)x(H $\pm 0.1\text{mm}$)x(L+0.2/-0.1mm) (L<2.5mm)
	(W $\pm 0.1\text{mm}$)x(H $\pm 0.1\text{mm}$)x(L+0.5/-0.1mm) (L $\geq 2.5\text{mm}$)
Angle Tolerance	$\leq 0.5^\circ$
Damage Threshold[GW/cm ²]	>1 for 1064nm, TEM00, 10ns, 10Hz (AR-coated)
Coatings	HR@1064nm+532nm+HT @808nm/AR@1064nm+532nm

OPTICAL AND SPECTRAL PROPERTIES

Property	Value
Laser Wavelength	1064nm, 1342nm
Polarized Laser Emission	π polarization; parallel to optic axis (c-axis)
Pump Wavelength	808nm
Intrinsic Loss	0.02cm ⁻¹ @1064nm
Diode Pumped Optical to Optical Efficiency	>60%
Emission Cross Section	25x10 ⁻¹⁹ cm ² @1064nm
Fluorescence Lifetime	90 μs (about 50 μs for 2 atm% Nd doped) @ 808 nm
Gain Bandwidth	0.96nm @1064nm
Refractive Index	1.9573(no); 2.1652(ne) @1064nm
	1.9721(no); 2.1858(ne) @808nm
	2.0210(no); 2.2560(ne) @532nm
Absorption Coefficient	31.4 cm ⁻¹ @ 808 nm
Absorption Length	0.32 mm @ 808 nm

SPECTRA

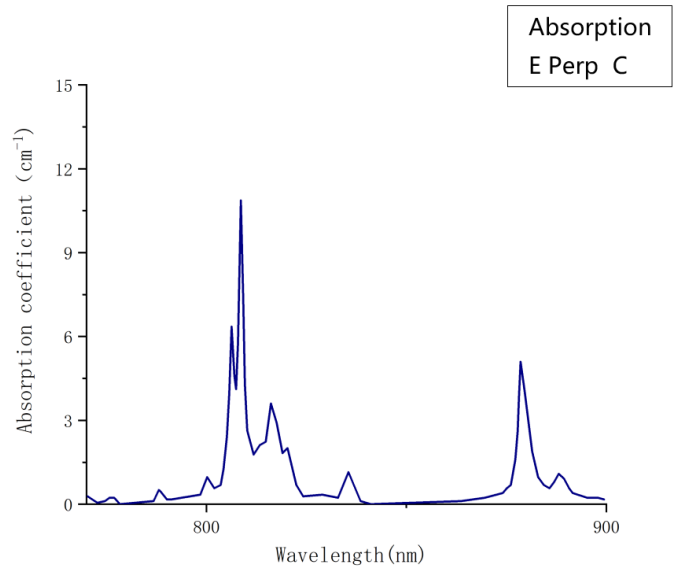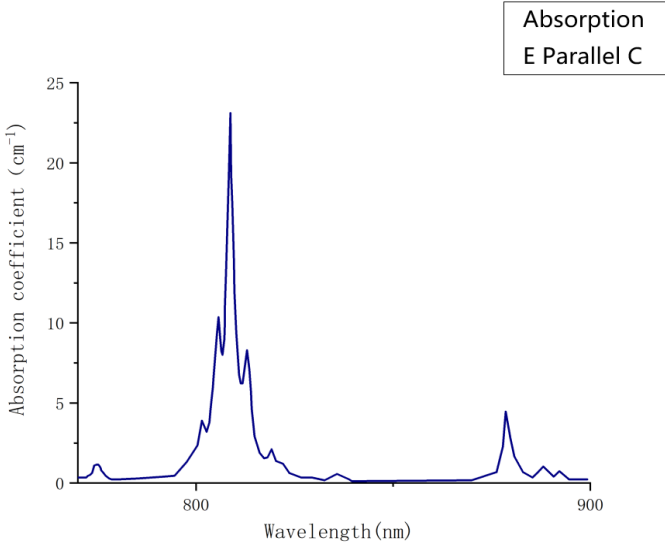

Nd:YVO₄ Nd-doped YVO₄

