


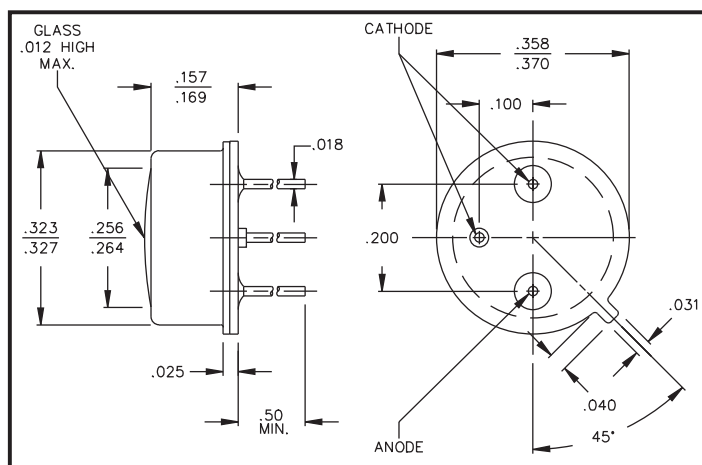

ODD-5W TO-5 Hermetic Pkg

FEATURES

- TO-5 hermetic package
- Circular active area
- Low capacitance

ELECTRO-OPTICAL CHARACTERISTICS AT 25°C

PARAMETERS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Active Area	2.52mm DIA.		5		mm ²
Responsivity, $\mathcal{R}$	@ 632nm	0.35	0.40		A/W
Dark Current, I_{dr}	$V_R = 10V$		1	3	nA
Reverse Breakdown Voltage, V_R	$I_R = 10\mu A$	25	60		Volts
Capacitance, C	$V_R = 10V$		11		pF
Rise Time	$V_R = 10V$		10		nsec
Series Resistance	$V_f = 1V$		35	100	Ohms

THERMAL PARAMETERS

Storage and Operating Temperature Range	-55°C TO 100°C
Maximum Junction Temperature	100°C
Lead Soldering Temperature ¹	260°0

¹ 1/16" from case for 10 seconds.

