

MV1-D2048-3D04-760-G2

The 3D CMOS camera MV1-D2048-3D04-760-G2 was developed for Laser triangulation systems with high triangulation rates

Features

- Detection of up to 2 laser lines (peak detector)
- 2D single line for 2D surface inspection and image overlay
- CMOSIS CMV2000 CMOS image sensor
- 2048 x 2048 pixel resolution
- Up to 7740fps @ 2048x23 pixels
- Global shutter
- Extended sensor and camera features
- A/B shaft encoder interface
- GigEVision interface
- Free GUI available (PF 3D Suite)



GigE[®]
VISION
GEN*i*CAM

Quantum Efficiency Image Sensor

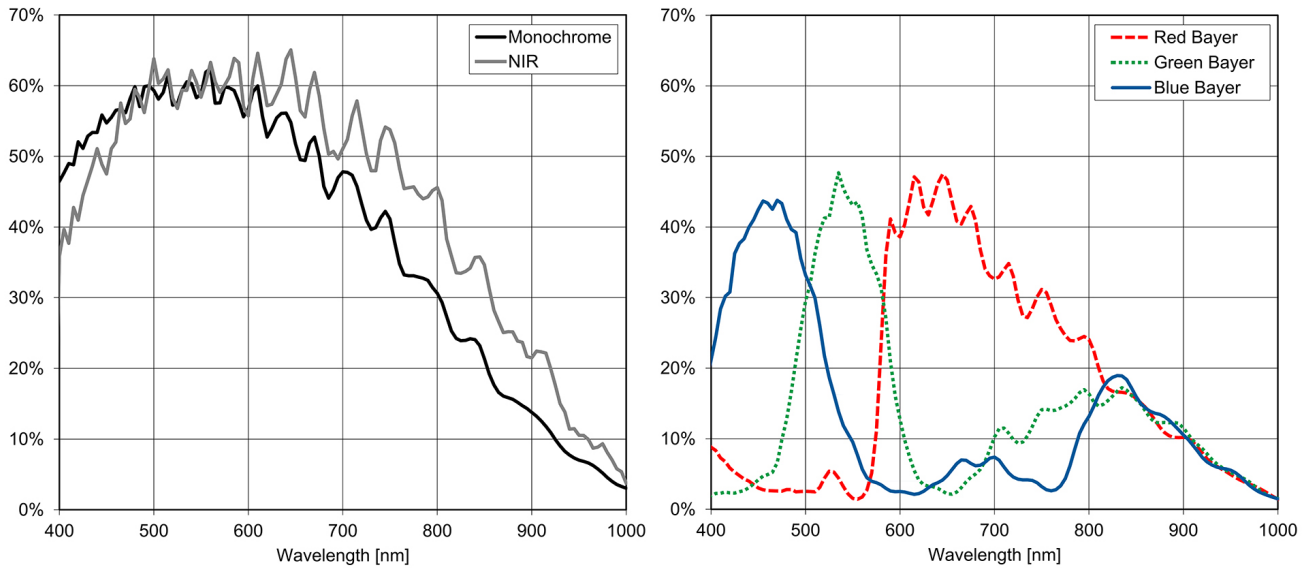


Image Sensor Specifications


| | |
|--------------------------|--|
| Manufacturer / Type | CMOSIS / CMV4000 |
| Technology | CMOS |
| Optical format | 1" |
| Optical diagonal | 12.76mm |
| Resolution | 2048 x 2048 |
| Pixel size | 5.5µm x 5.5µm |
| Active optical area | 11.26mm x 11.26mm |
| Dark current | 125e ⁻ /s |
| Read out noise | 13e ⁻ |
| Full well capacity / SNR | 11ke ⁻ / 105: 1 |
| Spectral range | Monochrome: < 350 to 950nm (to 10% of peak responsivity) |
| Responsivity | Monochrome: 1100 x 10 ³ DN / (J/m ²) @ 520nm / 8bit |
| Quantum Efficiency | Monochrome: > 60% |
| Optical fill factor | 42% without micro lenses |
| Dynamic range | 60dB |
| Characteristic curve | Linear, Piecewise linear |
| Shutter mode | Global shutter |

Camera Specifications





| | |
|----------------------------------|--|
| Interface | GigE |
| Frame rate | 7740fps |
| Pixel clock | 48MHz |
| Camera taps | 2 |
| Greyscale resolution | 8Bit |
| Fixed pattern noise (FPN) | < 1DN RMS @ 8Bit |
| Exposure time range | 24µs - 349ms |
| Analog gain | yes |
| Digital gain | 0.1 to 15.99 (FineGain) |
| Trigger Modes | Free running (non triggered), external Trigger, SWTrigger, AB-Trigger |
| Features | Detection of up to 2 laser lines (peak detector), 2D single line for 2D surface inspection and image overlay, Linear Mode / multiple slope (High Dynamic Range), Configurable region of interest (ROI), Temperature monitoring of camera, Ultra low trigger delay and low trigger jitter, Extended trigger input and strobe output functionality, Isolated inputs (2 single ended, 2 differential) and outputs (2 single ended), A/B shaft encoder interface (RS-422 (G2 models) or HTL (H2 models)), Free GUI available (PF 3D Suite) for an easy system set up and visualisation of 3D scans |
| Operation temperature / moisture | 0°C ... + 40°C / 20% ... 80% |
| Storage temperature / moisture | -25°C ... 60°C / 20% ... 95% |
| Power supply | +12VDC (-10%) ... +24VDC (+10%) |
| Power consumption | < 6W |
| Lens mount | C-Mount (CS-Mount optional) |
| I/O Inputs | 2x Opto-isolated 2x RS-422 or HTL Opto-isolated for AB-Trigger |
| I/O Outputs | 2x Opto-isolated |
| Dimensions | 55 x 55 x 52mm ³ |
| Mass | 265g |
| Connector I/O (Power) | Hirose 12-pole (mating plug HR10A-10P-12S) |
| Connector Interface | RJ-45 |
| Conformity | CE / RoHS / WEEE |
| IP Code | IP40 |

Connectors

| Pin | I/O Type | Name | Description |
|-----|----------|---------------------|---|
| 1 | PWR | CAMERA_GND | Camera GND 0V |
| 2 | PWR | CAMERA_PWR | Camera Power 12V... 24V |
| 3 | O | ISO_OUT0 | Default Strobe out, internally Pulled up to ISO_PWR with 4k7 Resistor |
| 4 | I | ISO_INC0_N | INC0 differential input (G2: RS-422, H2: HTL), negative polarity |
| 5 | I | ISO_INC0_P | INC0 differential input (G2: RS-422, H2: HTL), positive polarity |
| 6 | PWR | ISO_PWR | Power supply 5V... 24V for output signals |
| 7 | I | ISO_IN0 | IN0 input signal |
| 8 | O | ISO_OUT1 (MISC) | Q1 output from PLC, no Pull up to ISO_PWR; can be used as additional output (by adding Pull up) or as controllable switch (max. 100mA, no capacitive or inductive load) |
| 9 | I | ISO_IN1(Trigger IN) | Default Trigger IN |
| 10 | I | ISO_INC1_N | INC1 differential input (G2: RS-422, H2: HTL), negative polarity |
| 11 | I | ISO_INC1_P | INC1 differential input (G2: RS-422, H2: HTL), positive polarity |
| 12 | PWR | ISO_GND | I/O GND 0V |

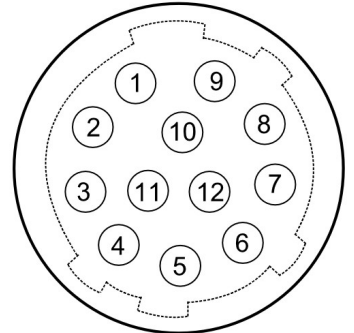

Dimensions

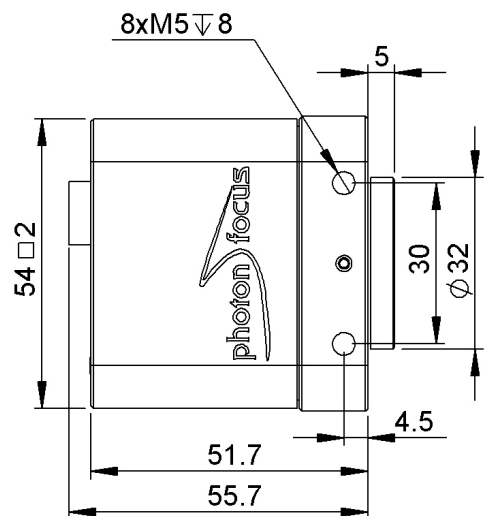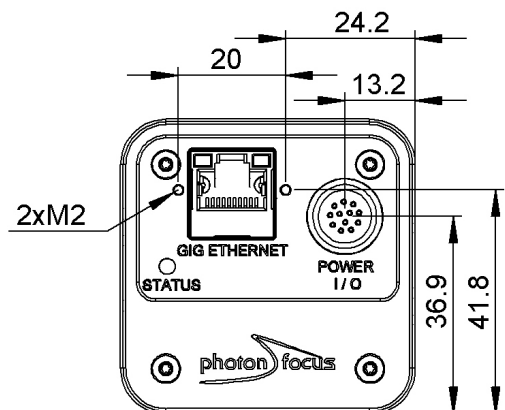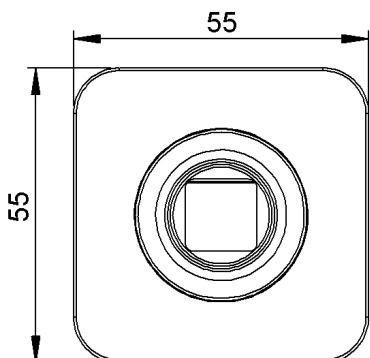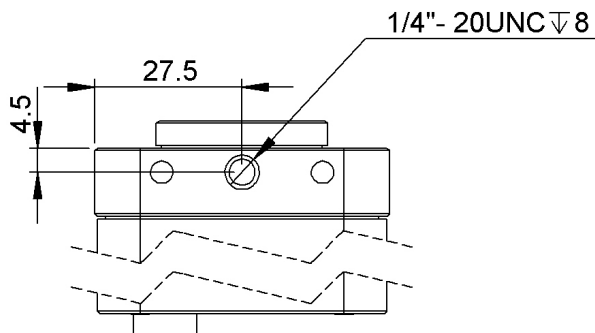

Explanation

| | |
|----------------|-------------------------------|
| DN | DigitalNumber (equals to LSB) |
| e ⁻ | Electrons |

Order Information

| | |
|-------------------------|--------------------------|
| MV1-D2048-3D04-760-G2-8 | RS-422 Encoder Interface |
| MV1-D2048-3D04-760-H2-8 | HTL Encoder Interface |

Compatibility



Photonfocus AG
Bahnhofplatz 10
CH-8853 Lachen SZ
Switzerland

Phone: +41 55 451 00 00
www.photonfocus.com
info@photonfocus.com