

# RIO ORION™ Series 1064nm Low Phase Noise Narrow Linewidth Laser Module

## Key features

- Single longitudinal mode
- Center wavelength: 1061nm-1067nm
- Very low phase noise
- Very narrow linewidth, long coherence length
- Ultra low RIN
- Excellent SMSR
- Unmatched wavelength stability over life and temperature
- Wavelength tunability
- Direct power modulation
- Very low sensitivity to vibration and acoustic noise
- SMF and PM fiber pigtail options
- Compact size, low power dissipation
- Easy to set-up and use
- Digital controller and firmware with multiple interface options (SPI, RS-232, RS-485)
- Telcordia GR-468 qualified
- RoHS compliant

## Applications

- Seeding of fiber and solid state lasers
- Second Harmonic Generation (SHG)
- Optical Parametric Oscillator (OPOs)
- LIDAR
- Laser Spectroscopy
- Metrology

## Preliminary Data Sheet March 2013



## Description

The ORION™ devices are compact laser modules employing the RIO high-performance External Cavity Laser (ECL). This laser design is based on RIO's proprietary planar technology (**PLANEX™**) and consists of a gain chip and a planar lightwave circuit including waveguides with Bragg gratings, forming a laser cavity with significant advantages.

The ORION™ modules provide a stable, self-contained, easy-to-use alternative to complicated, sensitive to the ambient environment and expensive fiber laser sources, or other narrow linewidth laser alternatives.

The ORION™ module uses reliable, Telcordia qualified and industry proven components, and employs low noise, digital laser bias current and temperature control circuitry to set and monitor laser performance. External monitoring and control can be accomplished via standard interfaces, using RIO-supplied software. The ORION™ module is an ideal source for seeding of high power fiber and solid state lasers, second harmonic generation and optical parametric oscillators, spectroscopy and other industrial and scientific applications, coherent Doppler LIDAR, metrology and optical sensing.

## Absolute Maximum Ratings

Operation of the device beyond these maximum conditions may degrade device performance, lead to device failure, shorter lifetime, and will invalidate the device warranty.

Parameter	Min	Max	Unit
Storage temperature	- 40	+ 85	°C
Module supply voltage		5.5	V
ESD-susceptibility		500	V
Fiber bend radius	35		mm
Tensile strength, fiber to the package		5	N

## Optical and Electrical Specifications

At recommended TEC set temperature  $T_s$  and bias current  $I_b$

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Output Optical Power	$P_{out}$	CW	See ordering information			mW
Power Stability over case temperature range	$dP_{out}$	5 to +50 °C		$\pm 20$		%
Center Wavelength <sup>1</sup>	$\lambda$		1061		1067	nm
Wavelength tuning range <sup>2</sup>	$\Delta\lambda_T$	via TEC temperature change	20			pm
Wavelength stability over case temperature range	$d\lambda$	5 to +50 °C		$\pm 50$		pm
Relative Intensity Noise	RIN	$\geq 1$ kHz		-135		dB/Hz
Side Mode Suppression Ratio	SMSR	CW, at specified $P_{out}$	50			dB
Optical S/N Ratio	S/N	From spontaneous noise levels at +/-1 nm from $\lambda$ , 50 pm RBW	60			dB
Polarization Extinction Ratio <sup>3</sup>	PER	For PM option, polarization and connector key aligned to slow axis	17	20		dB
Optical Isolation	ISO		23			dB
Voltage Supply	$V_{cc}$		4.75	5	5.25	V

1. Customized wavelength and setting tolerance are available. See ordering information.
2. Phase continuous wavelength tuning by changing TEC temperature settings. Some performance parameters will change over tuning range.
3. With PM-fiber PANDA option. See ordering information page.

## Linewidth and Phase Noise Specifications

At recommended TEC set temperature  $T_s$  and bias current  $I_b$ ,

Parameter	Symbol	Conditions	Grade 0	Grade 1	Unit
Spectral Linewidth	$\Delta\lambda_L$	FWHM <sup>1</sup>	$\leq 25$	$\leq 15$	kHz

1. Value based on Lorentzian linewidth model.

## Thermal Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Operating temperature range (case)	$T_c$		+5		+50	°C
Power Dissipation	$P_d$	Over case temperature range			5	W
Total current	$I_{max}$	Over case temperature range			1.1	A

## Connectors


#	Description
A	FC/APC connector on pigtailed fiber.
B	Interface D-9 Female connector for power supply, external monitoring and control. Control Interface

## Interface connector B

Pin #	Function SPI	Function RS-232	Function RS-485	Note
1	Vcc +5V	Vcc +5V	Vcc +5V	4.75 V Min, 5.25V Max, Regulated, Low noise (<100mVp-p)
2	MISO (output)	Tx	Data +; 1 k $\Omega$ diff impedance	
3	MOSI (input)	Rx	Data -; 1 k $\Omega$ diff impedance	
4	Modulation (input)	Modulation (input)	Modulation (input)	1 k $\Omega$ impedance
5	GND	GND	GND	
6	/Ready-Warning (output)	/Ready-Warning (output)	/Ready-Warning (output)	Active low, needs external pull up
7	/SPI SS (input)	Not used	Not used	3.3 to 5V TTL compatible
8	SPI CLK (input)	Not used	Not used	3.3 to 5V TTL compatible
9	/Enable (input)	/Enable (input)	/Enable (input)	12K internal pull up to Vcc (active low)
Configuration	4-wire SPI slave. Bit order: MSB first. Bit rate: $\leq$ 2 MHz . MISO and MOSI: 3.3V drive, TTL level compatible, data centered on rising clk. /SS: Slave Select (active low). CLK: Idle state is low, data clocked on rising edge.	9600 Baud. 8 Data Bits. No Parity Bit. 1 Stop Bit. No Flow Control.  TTL asynchronous serial option available at request	9600 Baud. 8 Data Bits. No Parity Bit. 1 Stop Bit. No Flow Control.	

## Mechanical Diagram

Units: Inch

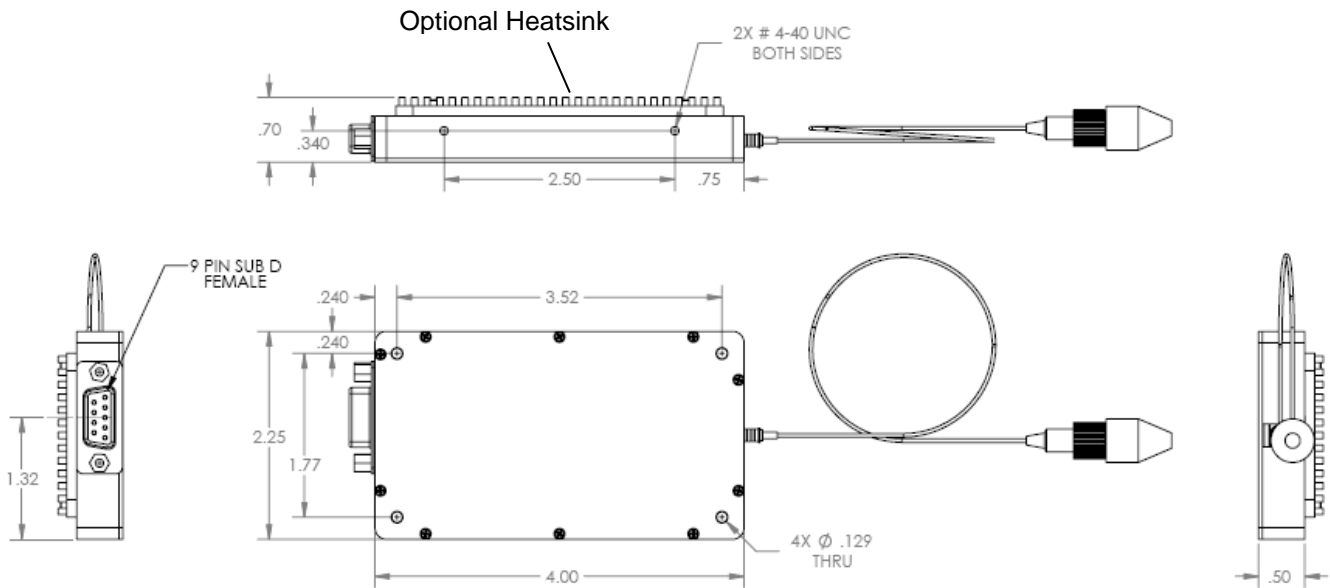

### ORION Housing Material Options:

- Electroless Nickel-plated Aluminum (standard)
- Nickel-plated Copper (optional)

### Pigtail options (FC/APC connector):

- Hi 1060 SMF, 900  $\mu\text{m}$  loose tube, 1 m
- SM98 PMF PANDA, 900  $\mu\text{m}$  loose tube, 1m, key aligned to slow axis

## Certifications

- CE certified

Rev.0.0.1

### Proprietary Information


© Redfern Integrated Optics (RIO), Inc.  
3350 Scott Blvd, Bldg 62  
Santa Clara, CA 95054 USA

Tel (408) 970 3500  
Fax (408) 970 3200  
sales@rio-inc.com

All preliminary information contained herein is believed to be accurate and is subject to change without notice. No responsibility is assumed for its use. Redfern Integrated Optics, Inc., its subsidiaries and affiliates, or manufacturer, reserve the right to make changes, without notice, to product design, product components, and product manufacturing methods. Some specific combinations of options may not be available. Please contact Redfern Integrated Optics for more information. ©Redfern Integrated Optics, Inc.. All rights reserved.



## Ordering Information

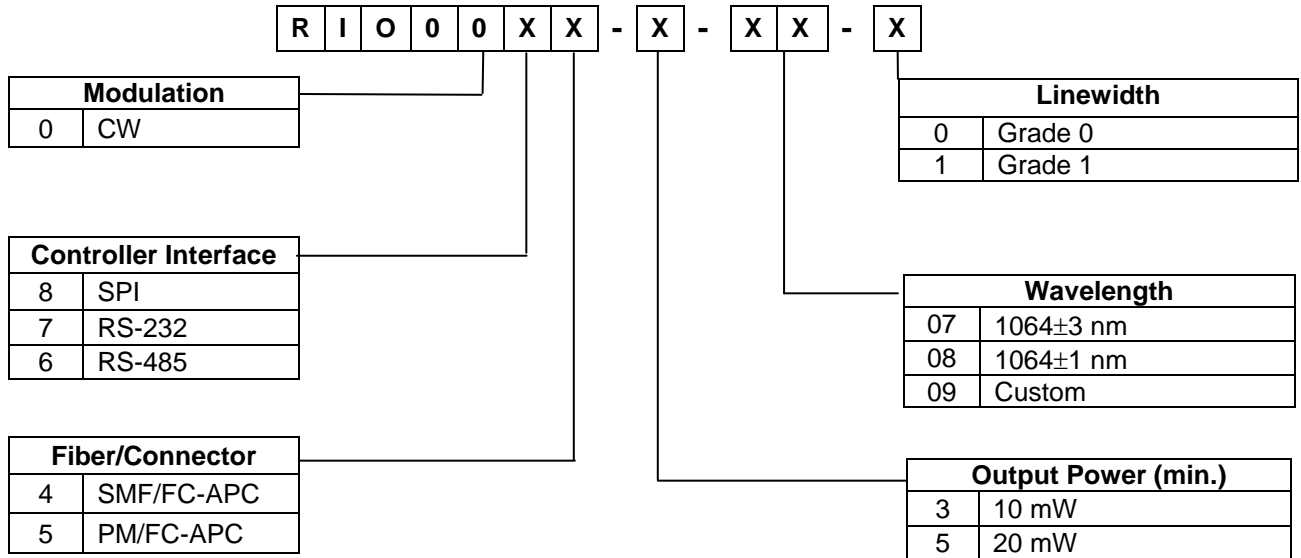

## Accessories

Accessory PN	Description
RIO008X-KIT	5V DC power supply, CD w/ GUI & USB/SPI Aardvark adaptor with cable
RIO018X-KIT	5V DC power supply, CD w/ GUI & USB/SPI Aardvark adaptor with cable (DM Tunable)
RIO007X-KIT	5V DC power supply, CD w/ GUI & RS232 interface cable
RIO017X-KIT	5V DC power supply, CD w/ GUI & RS232 interface cable (DM Tunable)
RIO006X-KIT	5V DC power supply, CD w/ GUI & RS485 interface cable
RIO016X-KIT	5V DC power supply, CD w/ GUI & RS485 interface cable (DM Tunable)
RIO0HS	External heatsink w/ hardware

## Laser Safety Information

The ORION Laser Module is classified as FDA/CDRH Class IIIb laser products per CDRH, 21 CFR 1040 laser safety requirements.

<b>DANGER</b>	<b>LASER APERTURE</b>
<p style="text-align: center; margin: 0;"><b>INVISIBLE LASER RADIATION</b></p> <p style="text-align: center; margin: 0;"><b>BEAM</b></p> <p style="text-align: center; margin: 0; font-size: small;">MAX. OUTPUT POWER: 20 mW WAVELENGTH: 1.06 μm CLASS III b LASER PRODUCT</p>	<p style="text-align: center; margin: 0; font-size: small;">AVOID EXPOSURE Invisible laser radiation is emitted from end of fiber or connector</p>