

SB1-532-20-1

Spec. #: SB1-21109

Microchip Laser



MAIN FEATURES

- 532 nm
- < 1.3 ns
- > 20 uJ
- Single Longitudinal Mode
- All-In-One Miniature Design

| Technical Specifications | | |
|--|----------------|------|
| Output Wavelength | 532 | nm |
| Pulse Repetition Rate | 1 | kHz |
| Pulse energy | > 20 | uJ |
| Pulse Width | < 1.3 | ns |
| Peak Power | > 15 | kW |
| Short Term Output Energy Instability (St.Dev. Over > 10000 samples) | < 3 % | |
| Long Term Output Power Instability (Power log over 24 hours) | < 5 % | |
| Beam Quality (M²) | < 1.3 | |
| Output Beam Diameter at Exit Aperture (1/e2) without beam expander | < 0.3 | mm |
| Beam Divergence (half angle) without beam expander | < 4 | mrad |
| Beam Ellipticity (axes ratio) | > 0.80 | |
| Warm Up time after cold start | < 5 | min |
| Power Consumption | < 20 | W |
| Mechanical Package | SB1 | |
| Operational Temperature Range | +10°C to +40°C | |
| Storage Temperature Range | -20°C to +60°C | |

All information included in this document are subject to change without notice. Updated data sheets can be provided on request.

For further details, please contact your local **Bright Microlaser** sales representative or visit our website at www.brightmicrolaser.com

Bright Microlaser Srl


Via Artigiani, 21 27010 Cura Carpignano - PV

Italy

Phone: +39 0382 583094

e-mail: info@brightmicrolaser.com



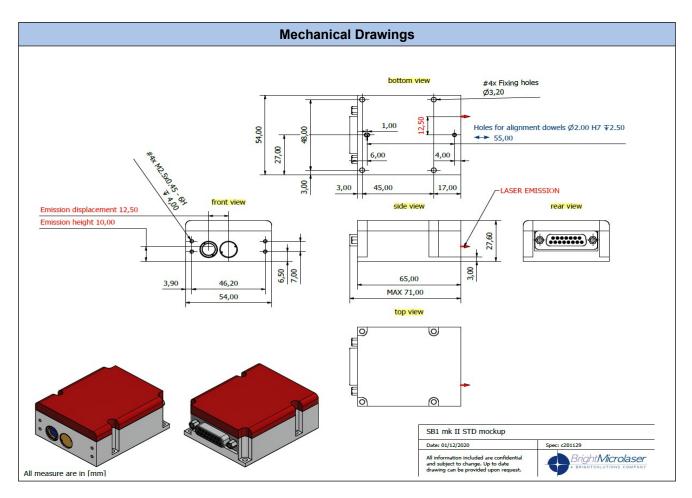

Options Available:

- Beam Expander and Collimator
- Heat-sink
- Development kit
- Quick start/evaluation kit

All information included in this document are subject to change without notice. Updated data sheets can be provided on request.

For further details, please contact your local **Bright Microlaser** sales representative or visit our website at www.brightmicrolaser.com

Bright Microlaser Srl

Via Artigiani, 21 27010 Cura Carpignano - PV

Italy

Phone: +39 0382 583094

e-mail: info@brightmicrolaser.com