

Features:

- CW output power of up to 20 mW
- LD-like spatial brightness, single transverse mode output
- LED-like bell-shaped spectrum with a very small ripples

Applications:

- Atomic force microscopy
- Optical coherence tomography
- Optical sensors
- Optical measurements
- Low speckle illumination
- Others

TO-9 Package**Specifications (at +25 °C case):**

Parameter	Min	Typ.	Max
Output power, P, mW	—	—	20
Forward current, mA	—	—	140
Forward voltage, V	—	—	2.5
Central wavelength*, nm	785	795	805
Spectrum width*, nm	10	15	—
Residual spectral modulation depth*, % (Resolution 0.02 nm)	—	1.0	5.0
Wavelength shift with temperature $P>5$ mW, $d\lambda/dT$, nm/°C, to λ at +25 °C	—	0.24	—
Secondary coherence subpeaks*, (10 log), dB	—	-25 [†]	—
Polarization ratio*, dB	—	10	—
Far field divergence in the p-n junction plane*, degrees	—	8	—
Far field divergence in the plane normal to p-n junction*, degrees	—	40	—
PD monitor photocurrent*, μA	100	—	—
Operating temperature [‡] , °C	-20	—	+55
Storage temperature, °C	-55	—	+85

* At an output power of 20 mW and a case temperature of +25 °C.

[†] Guaranteed secondary subpeaks below -20 dB upon request.

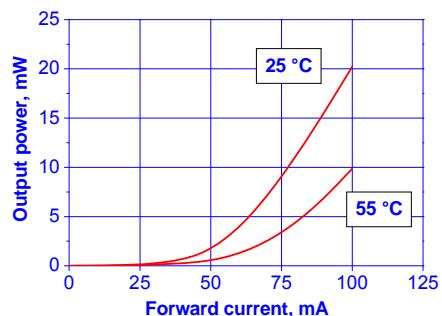
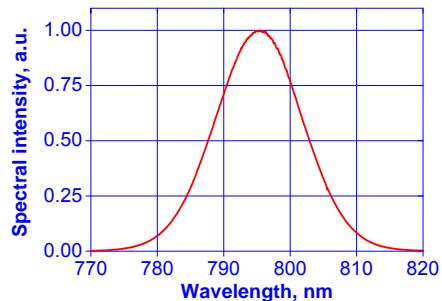
[‡] At +55 °C, maximum output power should not exceed 10 mW.

The following part number should be used when **ordering**:

SLD-340-MP-TO9-PD-795

All specifications are subject to change without notice.

Rev.01.ST340TO9MP795.300817

PERFORMANCE EXAMPLES**Light-current curves at different case temperatures****Spectrum example (20 mW)****Far field (20 mW)**