


**TEM₀₀ beam profile, short pulse duration, Q-switched solid-state lasers
Tailored to match your needs**


For industrial applications as well as fundamental research Xiton Photonics develops specific solutions which match precisely customer requirements even at exotic wavelengths.

Our clients are organizations with a world wide reputation like Max Planck and Fraunhofer Institutes.

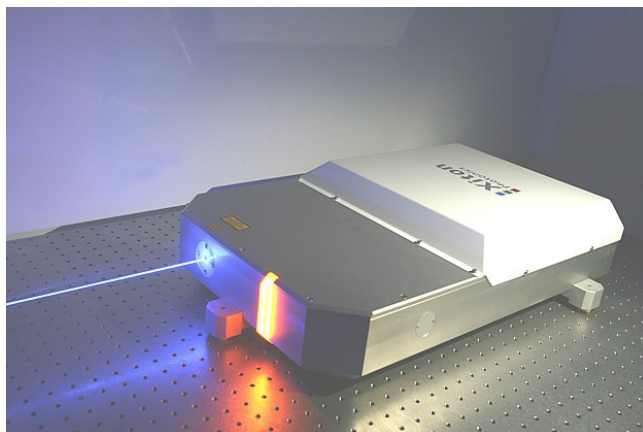

Single Frequency ns-Lasers

Single longitudinal and transversal mode emission is achieved by injection-seeding with the narrow-linewidth radiation of a cw micro-chip laser. The lasers provide short output pulses with a duration of $\Delta t < 12$ ns in a diffraction-limited beam with $M^2 < 1.2$ at a repetition rate of 8 to 15 kHz. The spectral bandwidth of the seeded laser output is $\Delta \nu < 80$ MHz. These lasers are well suited for scientific applications due to a high pulse-to-pulse stability of $\sigma < 1\%$. The average output power is up to 10 W at 1064 nm, and 5 W at the frequency-doubled wavelength of 532 nm. The UV wavelengths 355nm, 266nm and 213nm have ultra-stable pulse traces and a high coherence length not presentable with conventional lasers.

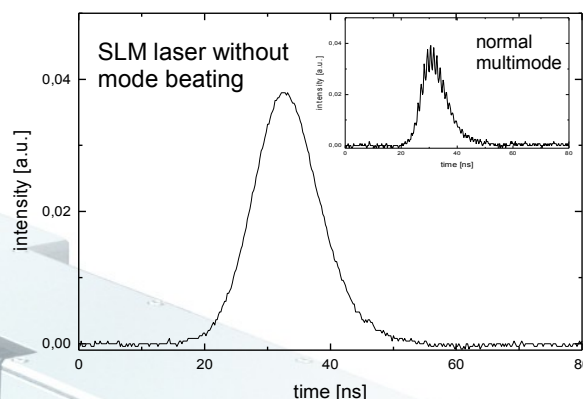

Model	SLM-1.06	SLM-S	SLM-T	SLM-5HG	IXION-193-SLM
wavelength	1064 nm	532 nm	355 nm	213 nm	193.368 nm
spectral bandwidth	< 80 MHz	< 80 MHz	< 80 MHz	< 80 MHz	< 100 MHz
average power	> 8.0 W	> 4.0 W	> 2.0 W	> 100 mW	> 10 mW
pulse duration	< 12 ns	< 12 ns	< 10 ns	< 8 ns	< 6-8 ns
energy per pulse	800 μ J	400 μ J	200 μ J	10 μ J	1.6 μ J
repetition rate	8 -15 kHz	8 - 15 kHz	8 - 15 kHz	08 - 15 kHz	6 kHz
M ²	< 1.2	< 1.3	< 1.3	< 1.6	< 1.6
pulse-to-pulse stab.	$\sigma < 0.3$ %	$\sigma < 1.0$ %	$\sigma < 2.0$ %	$\sigma < 2.5$ %	$\sigma < 2.5$ %

All specifications at 10kHz pulse repetition rate.
Specifications are subject to change without notice due to product improvement