



# SSP-3200

## 2,700 psi , 1.0 L/min.

The SSP-3200 is optimal for low viscosity fluids, is fully submersible and capable of operating in extreme temperatures (–40°C – 125°C).

## Specifications

### Minimum Inlet Pressure:

100 psi / 6.9 bar

### Maximum Outlet Pressure:

2,700 psi / 186.2 bar

### Recommended Frequency Range:

1,300 –1,800 Hz

### Power Supply:

24v DC

## Dimensions


### Size:

Ø 1.5 x 6.75 in

Ø 3.81 x 17.145 cm

### Weight:

Up to 1.6 lbs. / 0.73 kg

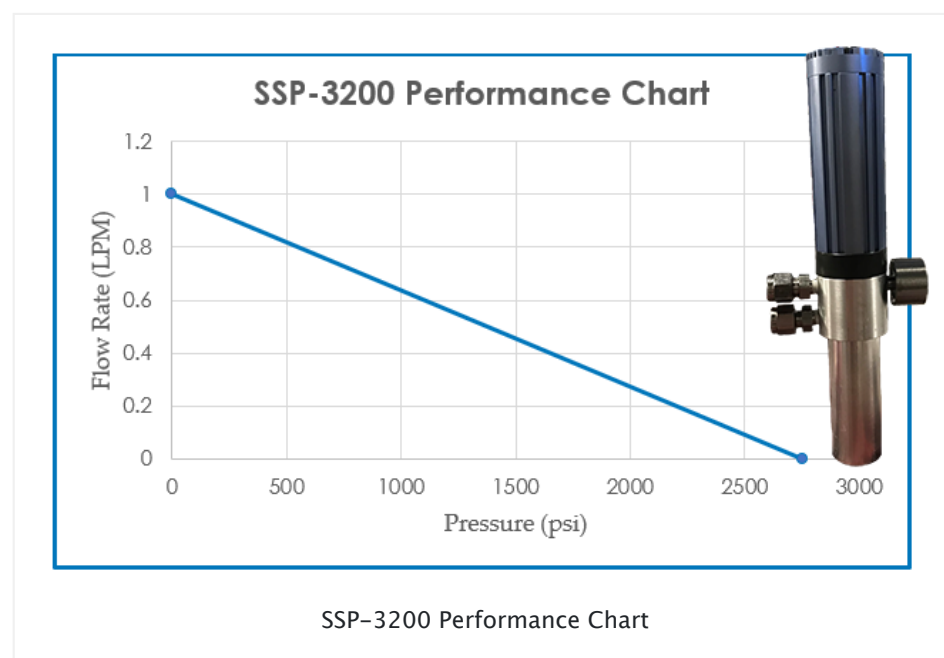

## Do you have a question about our Solid-State Pumps?

Complete this form or call us at 267-831-2016 to learn more about how Kinetic Ceramics can help you with previously unsolvable challenges.

[CONTACT US](#)

### Corporate Headquarters

3 Spring House Innovation Park  
Suite 107  
727 Norristown Road  
Ambler, PA 19002

### Contact Us

Tel: +1 (215) 234-3978  
Email: [info@kineticceramics.com](mailto:info@kineticceramics.com)

Copyright © 2020 Kinetic Ceramics.  
All rights Reserved.

[Privacy Policy](#)  
[Sitemap](#)

