



SSP-3400

100 psi , 7.0 L/min.

The SSP-3400 is ideal for low viscosity fluids, is fully submersible and capable of operating in extreme temperatures (–40°C – 125°C).

Specifications

Minimum Inlet Pressure:
Self-priming

Maximum Outlet Pressure:
100 psi / 6.9 bar


Recommended Frequency Range:
180 – 250 Hz

Power Supply:
24v DC

Dimensions

Size:
Ø 3.625 x 3.5 in
Ø 9.2075 x 8.89 cm

Weight:
Up to 3.6 lbs. / 1.63 kg

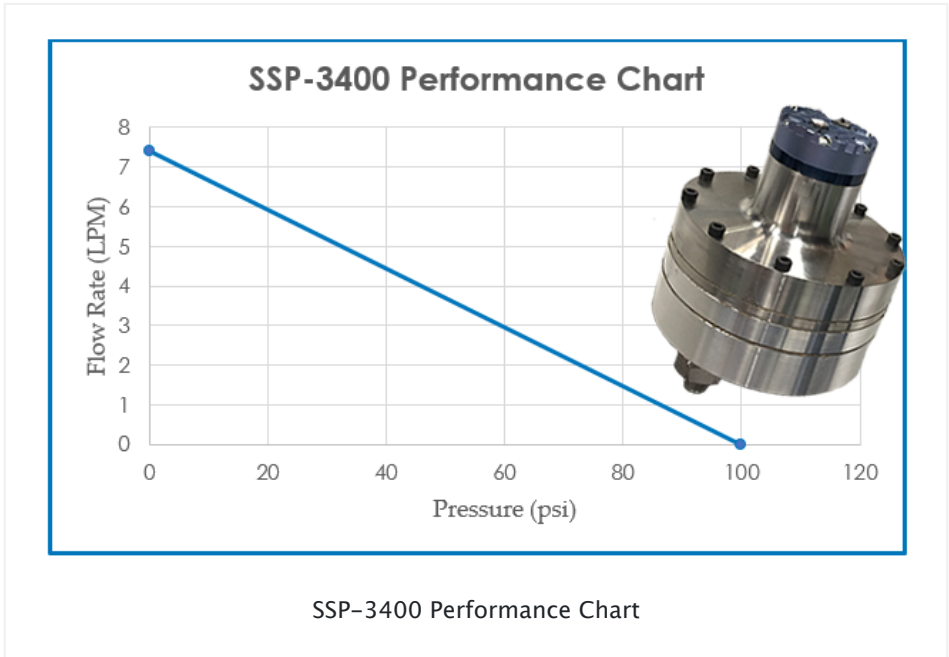

Learn more about how our Solid-State Pumps can help you with previously unsolvable challenges.

[CONTACT US](#)

Corporate Headquarters

3 Spring House Innovation Park
Suite 107
727 Norristown Road
Ambler, PA 19002

Contact Us

Tel: +1 (215) 234-3978
Email: info@kineticceramics.com

Copyright © 2020 Kinetic Ceramics.
All rights Reserved.
[Privacy Policy](#)
[Sitemap](#)

