

Concave Grating Polychromator Mounting




Order number 264510-2952-624

Grating specification

Groove density	320 ± 1 l/mm
Groove profile	Blazed
Diffraction grating area	$\geq \varnothing 39$ mm
Reflective coating	Aluminum (unprotected)
Grating master type	Holographically recorded
Grating type	Epoxy replica (copy)
Storage and transport temperature	-40 °C ... +60 °C (non-condensing environment)

Mounting specification (Schematic drawing)

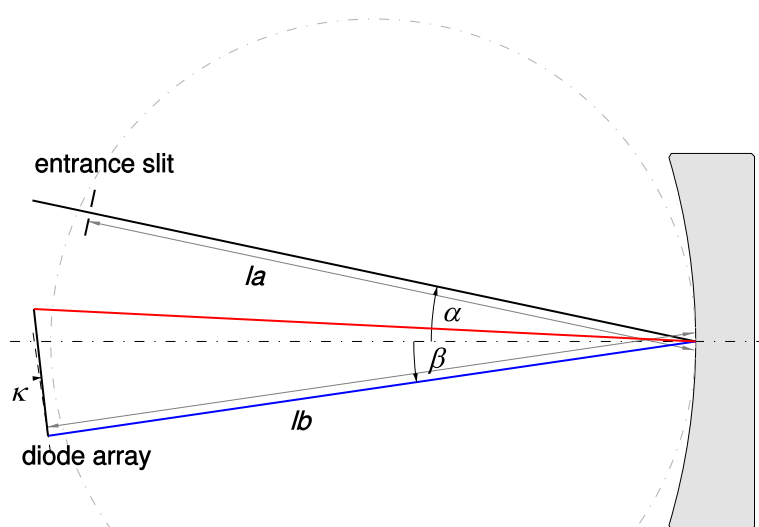



By historic convention clockwise incident and diffraction angles are positive.

Optical grating characteristics

Diffraction efficiency (unpolarized @ cAD = 32°)

225 nm	≥ 65 %
300 nm	≥ 50 %
500 nm	≥ 18 %


Typical relative diffraction efficiency (rDE) in first diffraction order

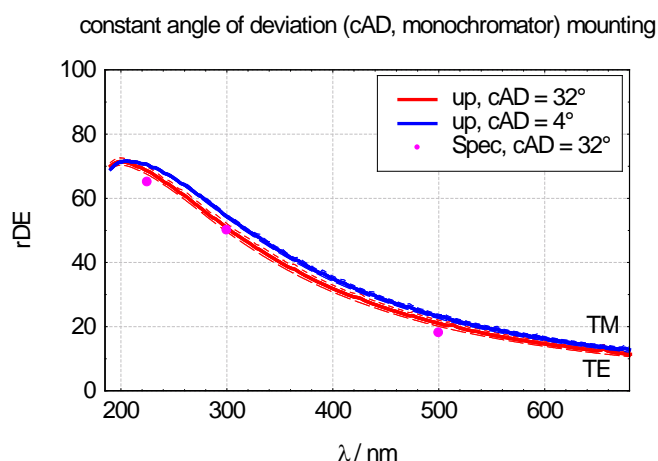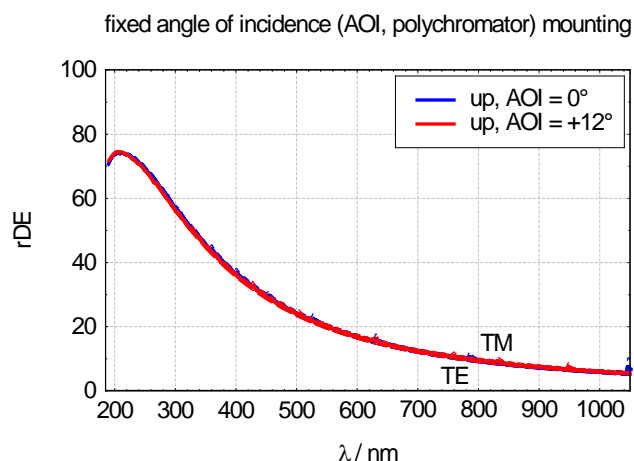

Typical efficiency curves based on rigorous electromagnetic modeling using measured AFM profiles. rDE refers to the ratio between diffracted power from the grating and reflected power from a mirror coated with the same material.

Blank specification

Material	N-BK7 (optical glass)
Radius of curvature	109.772 mm
Protective bevel (left surface)	0.5 mm

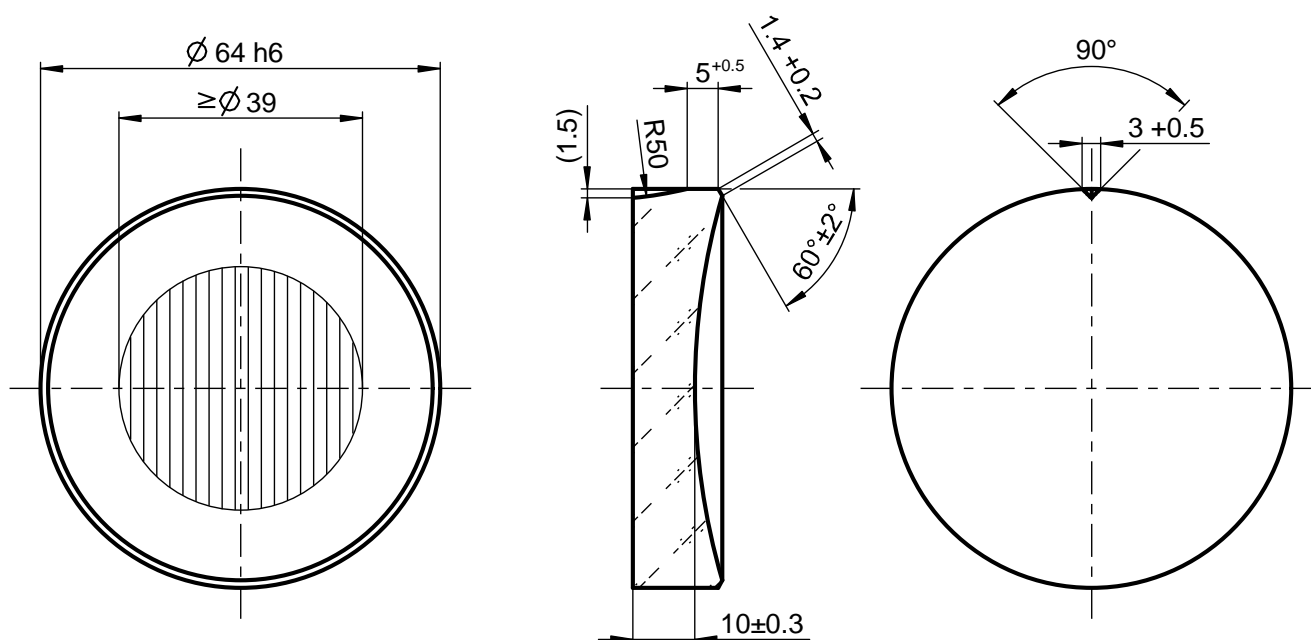

Application range	200 – 800 nm		700 – 1050 nm	
Object distance l_A	105.4 mm		113.9 mm	
Incidence angle α	12°		0.7°	
Spectrum length	21.6 mm		12.3 mm	
Reciprocal linear dispersion	27.8 nm/mm		28.4 nm/mm	
Astigmatism (point image extension)	< 2.0 mm		< 2.2 mm	
Point image resolution	< 3.8 nm		< 1.6 nm	
Relative aperture	1 : 2.1		1 : 2.3	
	$\lambda = 200 \text{ nm}$	$\lambda = 800 \text{ nm}$	$\lambda = 700 \text{ nm}$	$\lambda = 1050 \text{ nm}$
Focal distance l_B	111.4 mm		104.1 mm	
Diffraction angle β	-8.3°	2.8°	12.2°	18.9°
Tilt angle k of the detector array	-1.9°		-18.1°	

