



Key Features

- Power Stability
- Spectral Flatness
- Remote Monitoring

Applications

- Fiber Sensor
- Medical Imaging
- Passive Optical Components Test

For more Info

Please contact us at:

Tel: +86-755-23736280 Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

https://www.dkphotonics.com

Add.:


4F, Bldg. 18, Qinghu Industrial Park,


Dahe Road, Longhua Dis.,

Shenzhen, China 518109

C band ASE Broadband Light Source

C band ASE Broadband Light Source adopts the erbium-doped optical fiber spectral flatness technology, and has a high output power, the working wavelength covers the C-band, and is suitable for applications such as optical fiber sensing. Can provide communication interface and host computer software to facilitate the monitoring of the state of the light source.

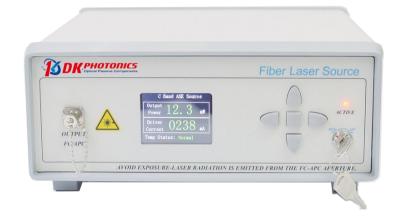

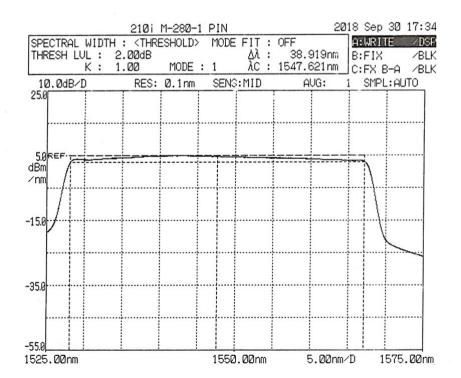





Performance Specifications C band ASE Broadband Light Source

Optical Parameter	Unit	Typical Values	Remark	
Wavelength range	nm	1528~1563	C band	
Output power	mW	10/20/50/100	Non-adjustable, power can be	
*Power adjustable (optional)	-	Adjustment 10%~100%	The spectral flatness does not	
Spectral flatness	dB	1.5 (Type), 2(Max)		
Output isolation	dB	>35		
Short-term Stability (15 Minutes)	dB	≤ ±0.02		
Long-term Stability (8 Hours)	dB	≤ ±0.05		
Degree of polarization DOP	dB	≤ 0.2		
Fiber Type	-	SMF-28		
Optical Connector	-	FC/APC		

Electrical and environmental parameters	Desktop	Module	
Control Mode	Button	RS232	
Communication Interface	* Optional	DB9 Female	
Power Supply	100~240V AC, <30W	5V DC, <15W 125(W)×150(D)×20(H)mm	
Dimensions	260(W)×280(D)×120(H)mm		
Operation Temperature Range	-5~+55°C		
Operation Humidity Range	0~70%		

Order information P/N: 10-2-3-4-5

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better.

1	2	3	4	(5)
ASE	Wavelength Range	Output power (mW)	Package Type	*Adjustable power (optional)
C:C-band		10/20/50	M: Module	*T
			B: Desktop	·

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.