

Polarization Maintaining Fused Coupler (488 - 2100 nm) (PMC Series)

Rev 11K

Key Features

- Wavelength 488 - 2100 nm available
- Coupling ratio from 0.01/99.99 to 50/50 available
- Operating on both fast and slow axes
- Low excess loss
- High power handling
- High stability and reliability

Applications

- Power monitoring
- Coherent communication
- Fiber gyroscope
- Fiber laser
- Fiber amplifier
- Test equipment

Specifications

Parameter	Unit	Value				
Center Wavelength (λ_c)	nm	488, 532, 635	780, 830	980, 1064	1310, 1480, 1550	1700, 2000
Operating Wavelength	nm	$\lambda_c \pm 5$	$\lambda_c \pm 10$	$\lambda_c \pm 10$	$\lambda_c \pm 20$	$\lambda_c \pm 20$
Typ. Excess Loss	dB	0.8	0.5	0.4	0.2	0.5
Max. Excess Loss	dB	1.2	0.8	0.6	0.4	0.8
Min. ER*	dB	18	18	20*	20	20
Max. Excess Loss for each connector	dB	1.5	0.7	0.5	0.3	0.3
Max. Optical Power (Continuous Wave)	W	2				
Thermal Stability	dB/°C	≤ 0.005				
Min. Return Loss	dB	50				
Min. Directivity	dB	50				
Fiber Type for Signal Port		PM fiber				
Fiber Type for Tap Port		PM fiber or Singlemode fiber				
Operating Temperature	°C	-5 to +70				
Storage Temperature	°C	-40 to +85				

Coupling Ratio & Its Tolerance

Coupling Ratio	%	1/99	2/98	5/95	10/90	20/80	30/70	40/60	50/50
Max. Coupling Ratio Tolerance, λ_c	%	± 0.3	± 0.5	± 0.7	± 1.0	± 2.0	± 2.0	± 2.5	± 3.0
Coupling Ratio	%	0.1/99.9			0.01/99.99				
Tap Ratio Tolerance, λ_c	dB	30 \pm 3			40 \pm 4				

*ER data listed in the table are for the ports with coupling ratio greater than 10%. It will be 2 dB lower for a tap port with coupling ratio between 1-10%. For 1% tap port, ER is not considered.


*ER will be 2 dB lower for Nufern FUD-3460 fiber and Nufern PM 1950.

*RL is 5 dB lower, ER is 2 dB lower for each connector added. Connector key is aligned to slow axis.

*The Optical Power is 1 W only for connector added. For visible wavelength, the limit is 50 mw.

*Data tested at central wavelength only.

Package Dimensions

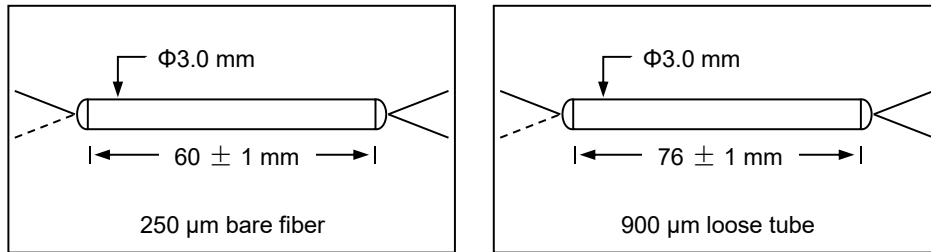

Ordering Information

PMC -①-②②②②-③③-④-⑤-⑥-⑦-⑧:

①: Configuration

1 - 1 × 2

2 - 2 × 2

②②②②: Wavelength

488 - 488 nm 1064 - 1064 nm

532 - 532 nm 1310 - 1310 nm

635 - 635 nm 1480 - 1480 nm

780 - 780 nm 1550 - 1550 nm

830 - 830 nm 1700 - 1700 nm

980 - 980 nm 2000 - 2000 nm

SSSS - Specify

③③: Coupling Ratio

01 - 01/99 40 - 40/60

02 - 02/98 50 - 50/50

05 - 05/95 0.1 - 0.1/99.9

10 - 10/90 0.01 - 0.01/99.99

20 - 20/80 SS - Specify

30 - 30/70

④: Fiber Type for Tap Port

P - PM fiber

S - Singlemode fiber

⑤: Connector Type

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

⑥: Fiber Jacket

B - 250 μm bare fiber

L - 900 μm loose tube

⑦: Fiber Length

H - 0.5 m

Q - 0.75 m

S - Specify

⑧: Fiber Type

1 - Nufern PM 460-HP

2 - Nufern PM 630-HP

3 - Corning Panda PM 850

4 - Corning Panda PM 980

5 - Corning Panda PM 1310

6 - Corning Panda PM 1550

7 - Nufern PM 1950

8 - Nufern FUD-3460

S - Specify