

NEW RIEGL

VQX-1 Wing Pod

The *RIEGL VQX-1* is a compact, rugged, and aerodynamically shaped wing pod, designed for user-friendly installation and to facilitate various airborne mapping applications.

The pod is designed to carry one *RIEGL* Laser Scanner (VQ-480 II, VQ-580 II-(S), VUX-240, VUX-120²³, VUX-160²³ or VQ-840-G/-GL) as well as up to three high-resolution cameras and an appropriate high-end IMU/GNSS system.

EASA approved (STC) for Cessna single piston engine aircraft of types 172, 182 and 206.



Fully Integrated Airborne Laser Scanning Solution

Typical Applications

• Corridor Mapping • Archeology and Cultural Heritage Documentation • Terrain and Canyon Mapping • Flood Zone Mapping • Surveying of Urban Environments • City Modeling • Glacier and Snowfield Mapping • Construction-Site Monitoring • Power Line, Railway Track, and Pipeline Inspection • Wide Area Mapping • Agriculture & Forestry • Emergency Management Planning • Accident Investigation • Moist Grassland Mapping



www.riegl.com





RIEGL VQX-1 Main Features & Key Facts

- robust and reliable wing pod
- uncompromising lightweight construction
- quick installation and removal
- turn-key solution ready to install (including power cabling)
- GNSS antenna to be mounted appropriately
- EASA STC'd for Cessna 172-, 182,- and 206- series



RIEGL VQX-1 Technical Data

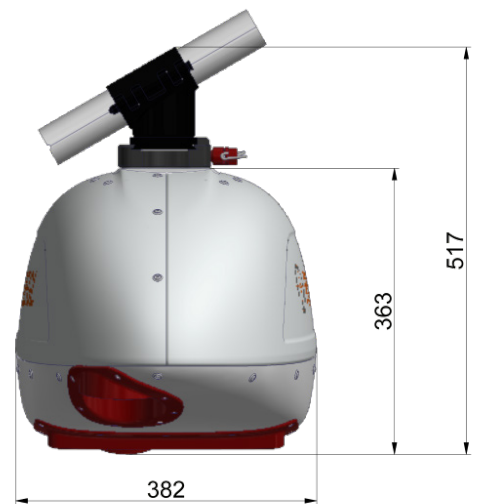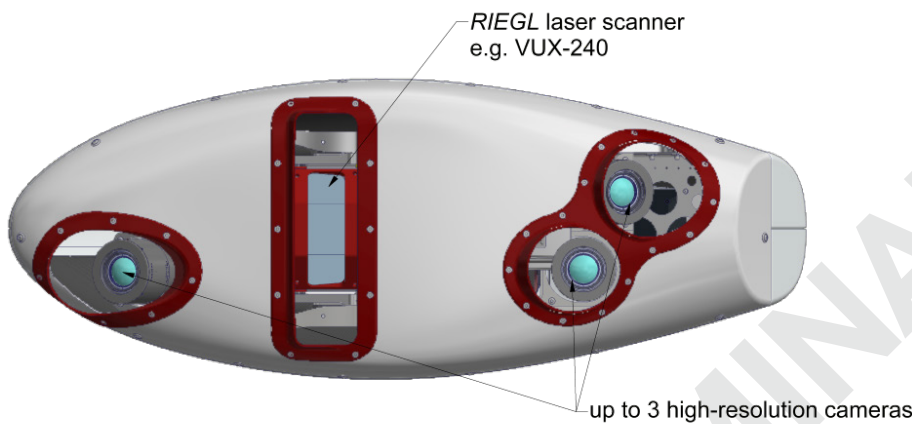

all dimensions in mm

| | |
|---|---|
| Integrable RIEGL Laser Scanners | VUX-120 ²³ , VUX160 ²³ , VUX-240, VQ-480 II, VQ-580 II-(S), VQ-840-G or VQ-840-GL |
| Scanner Performance | refer to the according RIEGL laser scanner data sheet |
| Pod Weight (weight of equipment to be added) | approx. 8.5 kg |
| IMU/GNSS Unit, e.g. Applanix AP60 | refer to the according IMU/GNSS data sheet |
| Possible Camera Orientations | 1 camera nadir or 2 cameras RGB/NIR nadir or 3 cameras forward / nadir / backward |
| Installation and Removal | quick installation and removal using the included mount; mounting and operation at the end-user's responsibility |

RIEGL VQX-1 Integration Options

The **RIEGL VQX-1** Wing Pod provides a wide range of sensor and camera installation options. *RIEGL* offers a system solution combining various *RIEGL* laser scanners with IMU/GNSS systems of different performance and optional cameras with various camera orientations.

Integration Options

RIEGL VQX-1
with VQ-480 II or VQ-580 II (-S) ¹⁾



- RIEGL VQ-480 II Laser Scanner
- 3x high-resolution camera, e.g., Phase One iXM 100
- IMU/GNSS unit, e.g. Applanix AP60
- Control Unit

RIEGL VQX-1
with VQ-840-G ¹⁾



- RIEGL VQ-840-G Topo-Bathymetric Laser Scanner
- IMU/GNSS unit, e.g. Applanix AP60
- Control Unit

RIEGL VQX-1
with VUX-240 ¹⁾



- RIEGL VUX-240 Laser Scanner
- 3x high-resolution camera, e.g., Phase One iXM 100
- IMU/GNSS unit, e.g. Applanix AP60
- Control Unit

¹⁾ See technical details in the corresponding datasheet



RIEGL's Cessna T206H test plane equipped with two VQX-1 wing pods





at a glance

RIEGL VQX-1

PRELIMINARY

Certain products referred to herein, whether registered or unregistered, may be trademarks and shall remain the intellectual property of the respective owner. RIEGL relies, among others, on the principle of "fair use" and makes no claim on trademarks of other manufacturers.



Watch our videos!
youtube.com/rieglidar

Copyright RIEGL Laser Measurement Systems GmbH © 2023– All rights reserved.
Use of this data sheet other than for personal purposes requires RIEGL's written consent.
This data sheet is compiled with care. However, errors cannot be fully excluded and alternations might be necessary.

www.riegl.com

