


MENISCUS

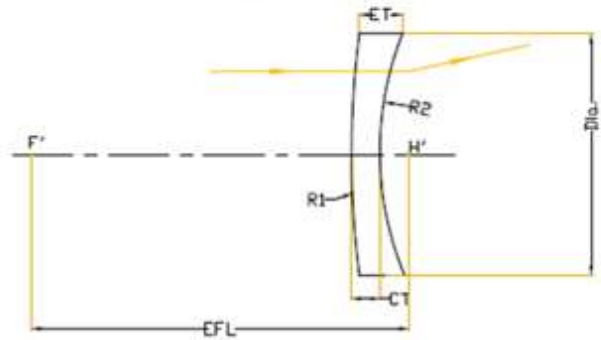

UM offers various specifications of meniscus lenses. Meniscus lenses are divided into positive and negative meniscus (meniscus) lenses. They are designed to reduce third-order spherical aberration.

SPECIFICATION

MENISCUS LENS

DIA,mm	EFL,mm	CT,mm
12.7	20	4.7
12.7	50	3
12.7	80	3
12.7	-20	2
12.7	-50	3
12.7	-80	3
25.4	40	8.9
25.4	50	7.1
25.4	75	5.6
25.4	100	4
25.4	150	4
25.4	200	4
25.4	500	4
25.4	750	4
25.4	1000	4
25.4	-40	4
25.4	-50	4
25.4	-75	4
25.4	-100	4
25.4	-150	4
25.4	-200	4
25.4	-500	4
25.4	-750	4
25.4	-1000	4

Custom size and specifications are available!!!

SPECIFICATION

STANDARD

Diameter	3-300mm
Dia. Tolerance	+0.0/-0.1mm
Thickness	0.3-200mm
Th. Tolerance	+0.1/-0.1mm
Surface quality	40-20/60-40
Flatness	1/4L or 1/2L
Concentricity	3 arcmin
Clear Aperture	>90%
Coating	Customizable

