


The *vacuum beaming*[™] Assemblies

4-axis manual control of the beam path under vacuum. Yaw, pitch, rotation and position adjustments are possible with a highly stable flexure mount. Supports up to 3” substrates. Flange type: KF 50. Pressure down to 10⁻⁶ mbar.

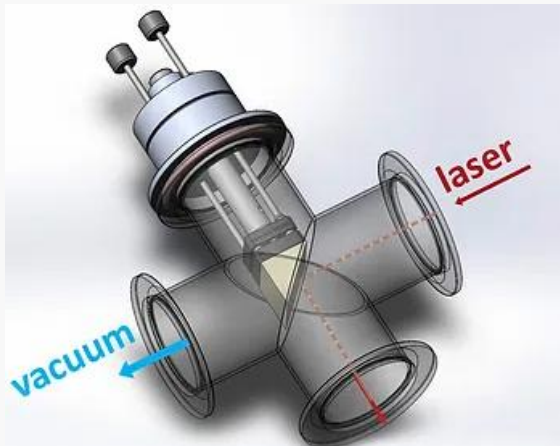

Address

1650 Boul. Lionel-Boulet
J3X 1P7 Varennes, Quebec
Canada

Copyright © 2021 *few-cycle*. All rights reserved.