
Uncooled Multi-Mode Pump Laser Module

CS0915P050A2

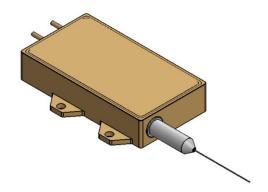

Features

- Stability over high output power 50W
- Precision alignment of multiple optics
- Isolated feedback protection
- 105/125 μm fiber diameter
- 0.22 NA

Electro-Optical Performance

Parameter	Symbol	50W			
		Min.	Тур.	Max.	Unit
Recommended Case Temperature	Тс	15	25	35	℃
Threshold Current	Ith	-	0.7	-	А
Optical Power	Pop	-	50	-	W
Conversion efficiency	η	-	50	-	%
Center Wavelength (25°C, Pop)	λη	905	915	925	nm
Spectral Width (FWHM)	λ(FWHM)	-	4	-	nm
Operating Current (25°C, Pop)	lop	-	11	12	A
Forward Voltage	Vf	-	-	12	V
Wavelength Shift vs. Temperature	Δλ/Τ	-	0.32	-	nm/K
Back reflection isolation 1060-1100nm		30			dB

Absolute Minimum/Maximum Ratings

Parameter	Symbol	501	l loit	
		Min.	Max.	Unit
Reverse Voltage	Vrvs	-	15.0	V
Storage Temperature	T _{stg}	-20	70	℃
Lead Soldering Temperature, 10sec(max)	Tıs	-	260	℃
Electrostatic Discharge (ESD)	Vesd	-	500	V
Fiber Bending Radius (Long term)	-	30	-	mm

Fiber Pigtail Information

· iou · iguai inioiniation					
Parameter	Symbol	Min	Тур	Max	Unit
Fiber Core Diameter	dc	-	105	-	μm
Fiber NA	NA	0.2	0.22	0.24	
Fiber Cladding Diameter	dcı	-	125	=	μm
Buffer Diameter	d₀	230	245	260	μm
Fiber Length	lf	0.9	1.0	-	m

Ordering Information

CS0915P050A1 50W 915nm Multi-Mode Pump Laser Module With 0.15NA Fiber CS0915P050A2 50W 915nm Multi-Mode Pump Laser Module With 0.22NA Fiber




CS0915P050A2


Dimension

(specification in mm unless otherwise noted.)

Pinout

Pin	Description	
A	Laser cathode (-)	
В	Laser anode (+)	

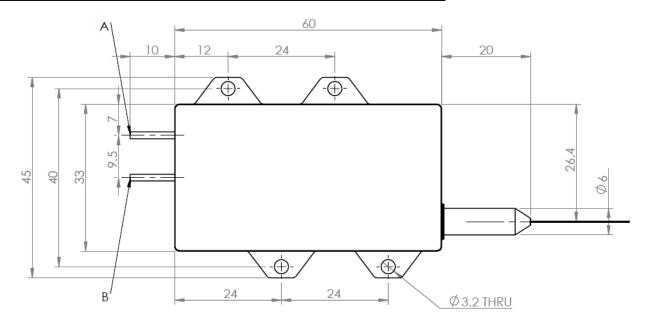

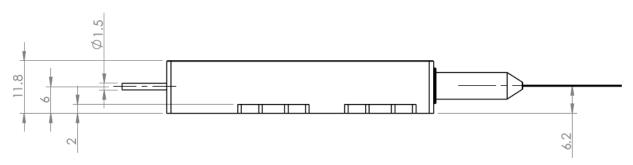

User Safety





CS Laser Limited Liability Partnership. 2nd Floor, Plot No. 28&29 Electronic Estate ITES/IT, SEZ Gandhinagar, Gujarat, INDIA For sales information, please contact sales@coset.com

Coset Inc. 39Cheomdan venture-ro,60Beon-gil,Buk-gu, Gwangju, 61009, KOREA Tel: +82-62-975-8882 Fax: +82-62-975-8889



All statements, technical information and recommendations related the products herein are based upon information believed to be reliable and accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. Coset Inc. reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sales herein.