




AL25--Fused Silica Plano-Convex Cylindrical Lenses

Material:	UV Grade Fused Silica
Design Wavelength:	587.6nm; n=1.45848
Diameter Tolerance:	+0.0/-0.2mm
Focal Length Tolerance:	±2%
Center Tolerance	5~15 arc minutes
Surface Quality:	40/20 scratch-dig
Clear Aperture:	>90%
Bevel:	0.2mmX45°
Coatings:	without coating

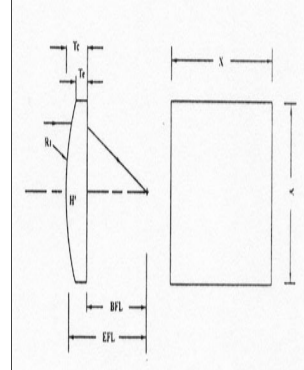

Catalog No.	XxY	EFL	(mm)			
			BFL	R ₁	T _c	T _e
AL25-010-050	10.0x10.0	50	48.241	22.92	2.55	2.0
AL25-010-100	10.0x10.0	100	98.444	45.85	2.27	2.0
AL25-010-150	10.0x10.0	150	148.516	68.78	2.18	2.0
AL25-010-200	10.0x10.0	200	198.533	91.70	2.14	2.0
AL25-010-250	10.0x10.0	250	248.542	114.62	2.11	2.0
AL25-010-300	10.0x10.0	300	298.567	137.55	2.09	2.0

[Featured Products](#) | [Optical Components](#) | [Laser Optics](#) | [Telecom Optics](#) | [Plastic Optics](#) | [Optical Materials](#)
[Company Info](#) | [Optics Reference Guide](#) | [Contact Us For A Quote](#) | [Links](#)

[Optical Components Home](#) | [Site Map](#)
 Our Networking Community | [Optical Components Polymer Optics](#)
 © Align Optics - Designed by Doss Designs

Align Optics
 4700 Hiatus Rd., Ste. 143-A
 Sunrise, FL 33351

Phone: 954-748-1715
 Toll Free 800-770-7320
 Fax: 954-748-2149
 E-Mail: sales@alignoptics.com