




Boxin Photoelectric Co.,Ltd

Provide best quality at low cost


Website: www.bxoptic.com

Phone : 86-0431-85960126-8062


Optical Crystal

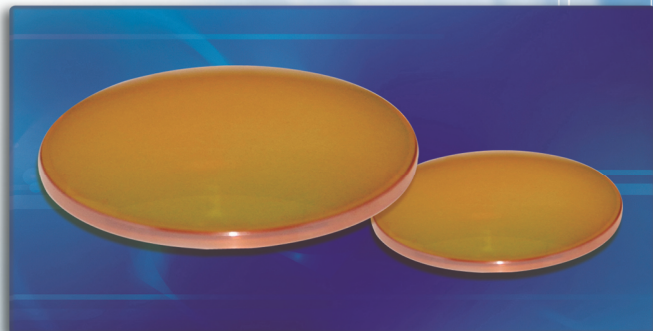


Material:	ZnS
Type:	window / lens / mirror
Diameter:	5—300mm
Diameter Tolerance:	±0.05
Thickness Tolerance:	±0.05
Surface Quality:	20/10-60/40 S/D
Surface Accuracy:	1/4λ-3λ per 25.4mm
Concentricity:	0.01mm
Parallelism:	5 arc seconds—3 arc minutes
Coating:	AR coating@VIS-IR

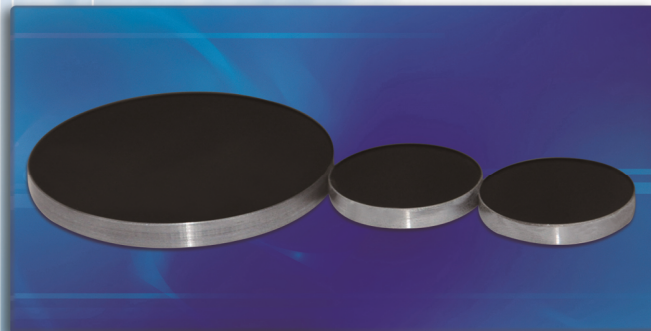

Material:	Silicon
Type:	window / lens / mirror / cylinder
Diameter:	5—300mm
Diameter Tolerance:	±0.05
Thickness Tolerance:	±0.05
Surface Quality:	10/5-60/40 S/D
Surface Accuracy:	1/4λ-3λ per 25.4mm
Concentricity:	0.01mm
Parallelism:	5 arc seconds—3 arc minutes
Coating:	AR/gold coating

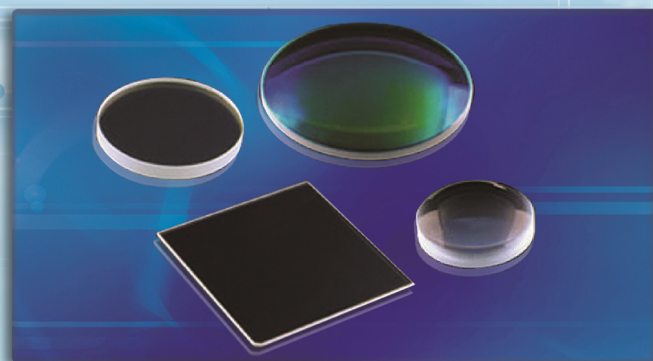

Material:	Sapphire
Type:	window / lens
Diameter:	5—300mm
Diameter Tolerance:	±0.05
Thickness Tolerance:	±0.05
Surface Quality:	20/10-60/40 S/D
Surface Accuracy:	1/4λ-3λ per 25.4mm
Concentricity:	0.01mm
Parallelism:	5 arc seconds—3 arc minutes
Coating:	AR coating@VIS-IR

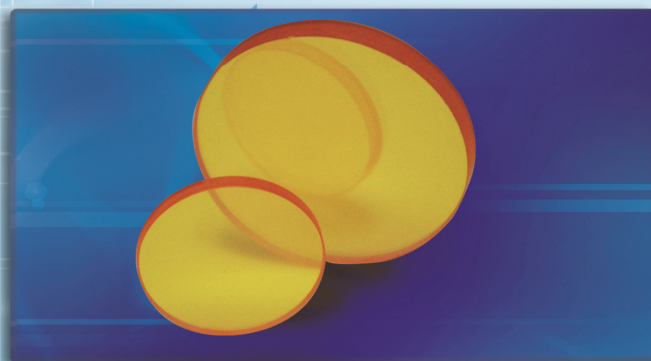

Material:	ZnSe
Type:	window/lens/aspherical lens/cylinder
Diameter:	5—300mm
Diameter Tolerance:	±0.05
Thickness Tolerance:	±0.05
Surface Quality:	20/10-60/40 S/D
Surface Accuracy:	1/4λ-3λ per 25.4mm
Concentricity:	0.01mm
Parallelism:	5 arc seconds—3 arc minutes
Coating:	AR@10.6μm/AR@2-14μm

Address : No. 155 , Zhuoyue East Street, High-Technology Industry Development Area, Chang Chun City, Ji Lin Prov. China P.O. Zip Code : 130103. E-mail: daidongmei@bxoptic.com
 Fax : 86-0431-85961722, 85961810

Website : www.bxoptic.com